

Technical data sheet

Junction box T 160, plug-in seal

Item number: 2007649



Junction box for the connection of cables and lines indoors and in protected outdoor areas. Rectangular design with plug-in seals to the sides and knock-out entries in the bottom. Suitable for wall and ceiling mounting and on mounting panels. With the option to fasten inside and to mount via the corner domes. Cover with quick lock, sealable. Made from halogen-free and UV-resistant materials.

Junction box according to DIN EN 60670. Flame-resistant to DIN EN 60695/2/11, test temperature 650 °C. Impact resistance IK05 according to DIN EN 50102.



PP/GF Polypropylene, fibreglass reinforced

Master data

| | |
|------------------------------------|--------------------------------------|
| Item number | 2007649 |
| Type | T 160 RO-LGR |
| Description 1 | Junction box |
| Description 2 | with entries, red cover |
| Manufacturer | OBO |
| Dimension | 190x150x77 |
| Colour | Grey / red |
| Material | Polypropylene, fibreglass reinforced |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 30 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 1,2467 kg CO2e / 1 Piece |


Technical data sheet

Junction box T 160, plug-in seal



Item number: 2007649

Dimensions

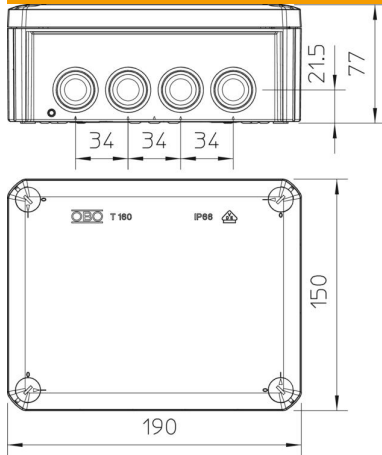

| | |
|--------|--------|
| Length | 190 mm |
| Width | 150 mm |
| Height | 77 mm |

Technical data

| | |
|-----------------------------------|---|
| Expandable | yes |
| No. of entries | 12 |
| Type of entry | Plug-in seal |
| Type of entry | Cable |
| Type of housing penetration | Cuttable stepped membrane |
| Measured insulation voltage V_i | 500 V |
| Equipment | Without |
| Cover | Not transparent |
| Cover fastening | Screwed |
| Entry from rear | yes |
| Entries | 7 x M25 5 x M32 |
| Explosion-tested version | no |
| Flame-resistant | acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C |
| Shape | Rectangular |
| Maintain electrical functions | Without |
| For Ex zone | Without |
| For Ex zone gas | Without |
| For Ex zone dust | Without |
| Fibre-glass reinforced | yes |
| Halogen-free | yes |
| Clear internal dimensions | 176x135x67 mm |
| With screening | no |
| with lid | yes |
| Mounting type | Wall/ceiling mounting |
| Nominal cross-section, min. | 16 mm ² |
| Nominal voltage | 500 V |
| Sealable | yes |
| Protection rating | IP66 |
| Protection rating IK code | IK05. |
| Permitted temperature range, max. | 65 °C |

Technical data sheet

Junction box T 160, plug-in seal

Item number: 2007649



Technical data

| | |
|-----------------------------------|--------|
| Permitted temperature range, min. | -25 °C |
| Transparent lid | no |
| Weatherproof | no |