

## INSAVER 205/225 MULTIPOWER


*Insaver U19 IP54 225 730-2350 830 Multi*

0030548



### Product features

- Insaver is a ceiling recessed LED downlight (IP54 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 3000K; UGR <19 with shallow product depth 60mm. The range features a multipower functionality where the luminous flux of the luminaire can be tailored to local needs by only setting a quick selector switch on the driver. 8 steps available with adjustable lumen output of 730 - 2350lm at 3000K . Meets TP(a) requirements.

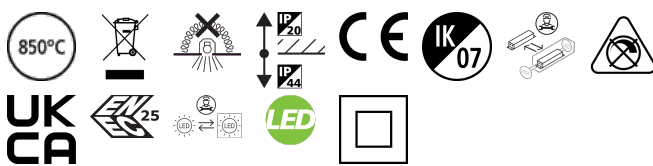

### PRODUCT OVERVIEW


Product name	Insaver U19 IP54 225 730-2350 830 Multi
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278538
Warranty	5 years
Useful luminous flux (Fuse)	2350
Fixture luminous flux (lm)	2350
Luminaire efficacy (lm/W)	124
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	19
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288305486

### PHOTOMETRY

## INSAVER 205/225 MULTIPOWER

*Insaver U19 IP54 225 730-2350 830 Multi*

0030548

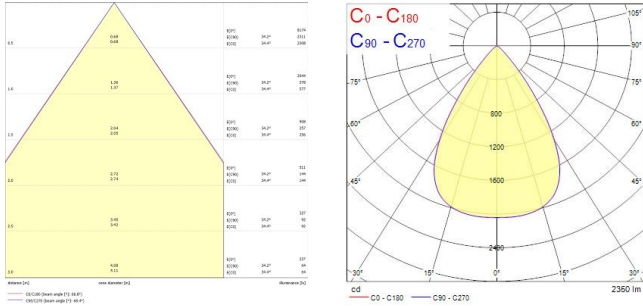

## TECHNICAL DRAWINGS

