




Features

- Perfect for decorative and general lighting applications and creates a warm ambience similar to traditional lamps The versatile ToLEDo Retro Candle range is the ideal replacement for halogen and incandescent lamps and perfect for chandeliers and decorative applications Same look, size and functionality as incandescent lamps Omni-directional light distribution Gives same sparkling light effect as the incandescent lamp Dimensionally identical to incandescent lamps - fits all fixtures Environment-friendly - no mercury and lower CO2 emissions Dimmable with approved dimmers

Product Overview

| | |
|---------------------------------|---|
| Product name | ToLEDo RT Candle V5 CL DIM 470LM 827 E14 SL |
| Technology | LED |
| Watt (Rated) (W) | 4.5 |
| Fixture rating | Open |
| E-number FI | 4740922 |
| Colour temperature (K) | 2700 |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 6 |
| Photobiological Risk Group | RG1 |
| Wattage (W) | 4.5 |
| Product EAN number | 5410288293448 |
| Warranty | 3 years |

Technical drawings

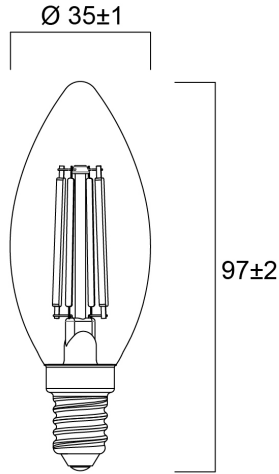

Data table

GENERAL DATA

| | |
|---|---|
| Product name | ToLEDo RT Candle V5 CL DIM 470LM 827 E14 SL |
| Technology | LED |
| Watt (Rated) (W) | 4.5 |
| Fixture rating | Open |
| Operating temperature range (°C) | -10°C...+45°C |
| Performance ambient temperature Tq (°C) | 25 |
| E-number FI | 4740922 |
| Warranty | 3 years |

OPTICAL DATA

| | |
|----------------------------|------|
| Luminous flux (Rated) (lm) | 470 |
| Colour temperature (K) | 2700 |

ToLEDo RT Candle V5 CL DIM 470LM 827 E14 SL 0029344

| | |
|--|-----|
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 6 |
| Photobiological Risk Group | RG1 |
| Lumen maintenance at end of nominal life (%) | 70 |

ELECTRICAL DATA

| | |
|--|-----|
| Wattage (W) | 4.5 |
| Equivalent watt (W) | 40 |
| Primary Supply/Product voltage - min (V) | 220 |
| Control gear required | No |
| Inrush Current (A) | 1.2 |
| Inrush Duration (μ s) | 520 |
| Lamp Energy Label (class) | F |

LIFETIME DATA

| | |
|--------------------------|-------|
| Lifespan L70 B50 | 15000 |
| Average life (Rated) (h) | 15000 |

PHYSICAL DATA

| | |
|-------------------------------|-------|
| Nominal Product Length (mm) | 97 |
| Nominal Product Diameter (mm) | 35 |
| Weight (kg) | 0.021 |

PACKAGING

| | |
|--------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5410288293448 |
| Packaging single width (cm) | 4.5 |
| Packaging single depth (cm) | 4.5 |
| DUN14 (outer) | 15410288293445 |
| Packaging outer length / height (cm) | 14.3 |

SAFETY DATA


SYLVANIA

ToLEDo RT Candle V5 CL DIM 470LM 827 E14 SL
0029344

| | |
|-------------------------------------|--|
| Optimal operating condition (°C) | -10-45 |
| Breakage cleaning instructions | Not applicable |
| Special purpose lamp | No |
| Dry applications use only | No |
| Suitable for household illumination | No |
| Safety message | Not Suitable for totally enclosed fixtures |

Energy label

 **ENERG** 
SYLVANIA
0029344

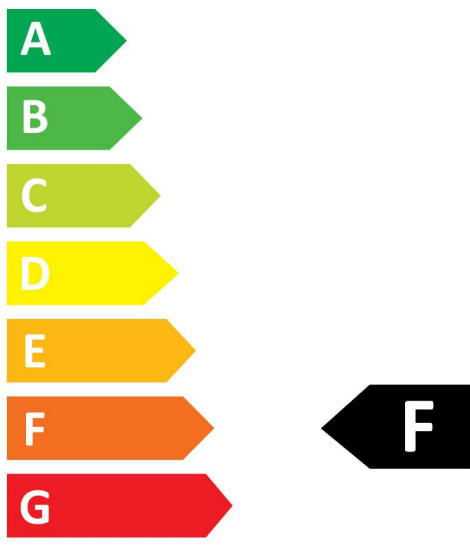


5
kWh/1000h



2019/2015

 **ENERG** 
SYLVANIA
0029344

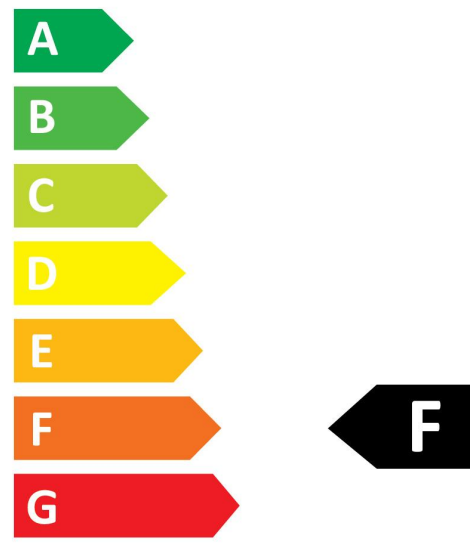

5
kWh/1000h



2019/2015

Light your world