

Features

• Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured black finishing colour Light color temperature: 3000K, warm white System power: 39W, Fixture lumen output: 5075lm, efficacy: 130lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.91mmx150mm 5 years warranty. Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal.


Product Overview

| | |
|---------------------|---|
| Product name | PIXO LARGE 5075LM 930 NB MB WB BLACK |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Track mounting |
| General application | Museums & Galleries, Retail, Office, Residential & Consumer |
| ETIM Class | EC001744 |

PIXO LARGE 5075LM 930 NB MB WB BLACK
0004545

| | |
|-----------------------------------|-----------------------------|
| E-number FI | 4279596 |
| Fixture luminous flux (lm) | 5075 |
| Luminaire efficacy (lm/W) | 130 |
| Correlated colour temperature (k) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 90 |
| Colour Variation Initial (SDCM) | 4 |
| Beam Angle (°) | 36 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 39 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | No |
| Housing colour | Black |
| IP rating | IP20 |
| IK rating | IK03 |
| Product EAN number | 5410288045450 |
| Warranty | 5 years |
| Dimming method | N/A |
| Useful luminous flux (#use) | 5075 |

Photometry

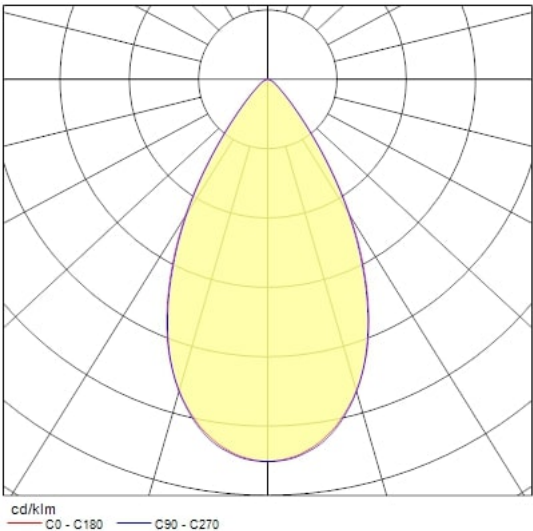

Technical drawings

