



Data Sheet | Item Number: 858-308

Relay module; Nominal input voltage: 220 VDC; 4 changeover contacts; Limiting continuous current: 5 A; with manual operation; Red status indicator; Module width: 31 mm



<https://www.wago.com/858-308>

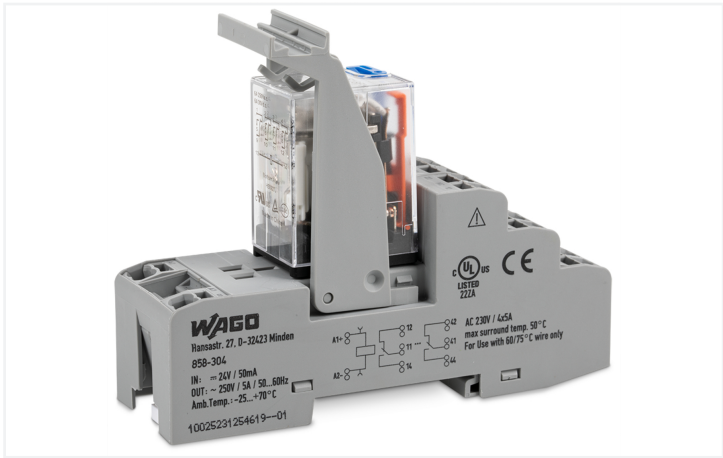

Similar to illustration

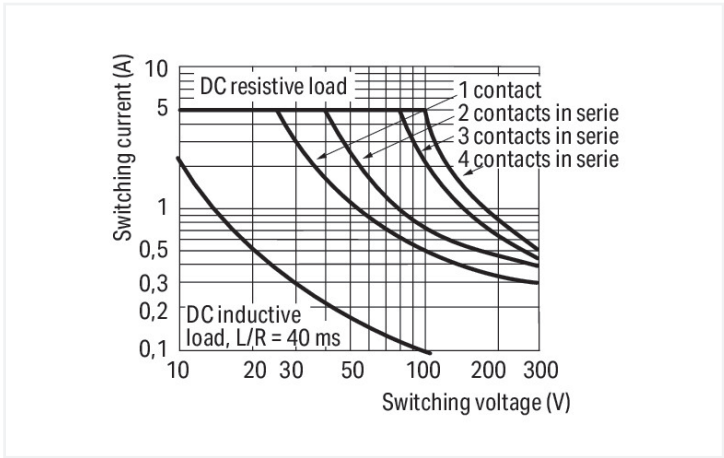

DC load limit curve

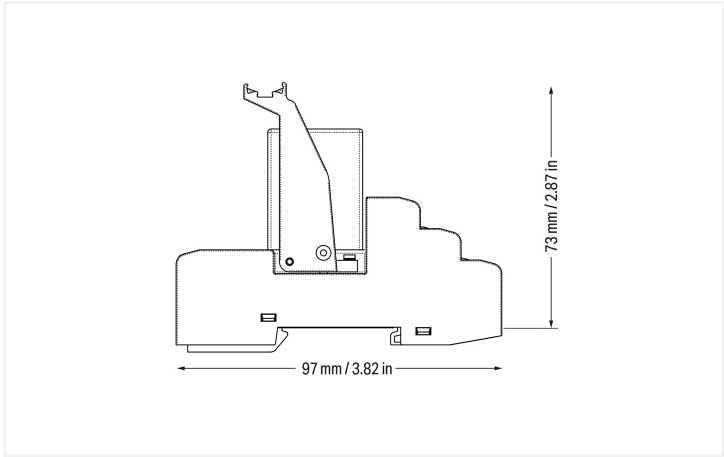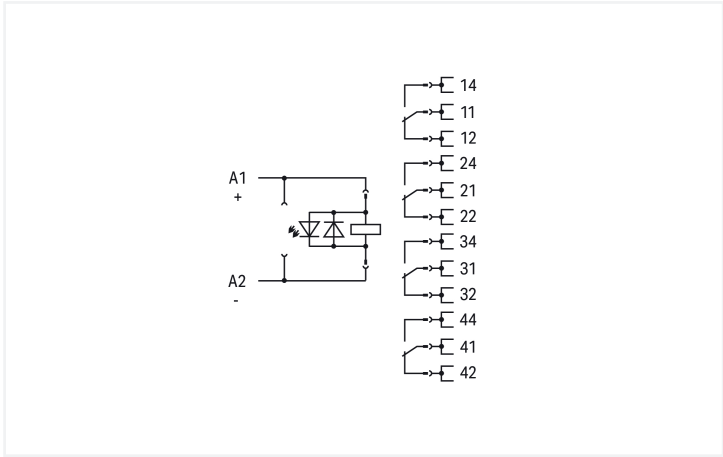

Technical data			
Control circuit		Load circuit	
Nominal input voltage U_N	220 VDC	Number of changeover/switchover contacts	4
Input voltage range	-20 ... +10 %	Contact material (relay)	AgCe
Nominal input current at U_N	5 mA	Limiting continuous current	5 A
		Inrush current (resistive) max.	(AC) 15 A / 4 s
		Switching Voltage, Max.	250 VAC
		Switching power (resistive) max.	AC 1250 VA; DC (see load limit curve)
		Switching capacity	AC-15: 1 A / 240 VAC; DC-13: 2 A / 24 VDC
		Recommended minimum load	12 V / 100 mA
		Pull-in time (typ.)	25 ms
		Drop-out time (typ.)	25 ms
		Bounce time (typ.)	4 ms
		Electrical life (NO; resistive load; 23 °C)	100 x 10 ³ switching operations
		Mechanical life	20 x 10 ⁶ switching operations

Signaling

Status indicator	Red LED Mechanical
------------------	-----------------------

Safety and protection

Rated Voltage	300 V
Rated impulse withstand voltage	2.5 kV
Overvoltage category	II
Pollution degree	2
Dielectric strength (control/load circuit) (AC, 1 min)	1.5 kVrms
Dielectric strength (open contact) (AC, 1 min)	1 kVrms
Dielectric strength (load/load circuit) (AC, 1 min)	1.5 kVrms
Insulation type (control/load circuit)	Basic insulation
Insulation type (open contact)	Functional insulation
Insulation type (load/load circuit)	Basic insulation
Insulation type (adjacent devices)	Reinforced insulation (safe isolation)
Protection type	IP20

Connection Data

Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.34 ... 1.5 mm² / 22 ... 16 AWG
Fine-stranded conductor	0.34 ... 1.5 mm² / 22 ... 16 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches
Note (conductor cross-section)	2 x 0.34 ... 2 x 1.5 mm² / 1 x 2.5 mm² / 2 x 22 ... 2 x 16 AWG

Physical data

Width	31 mm / 1.22 inches
Height	97 mm / 3.819 inches
Depth from upper-edge of DIN-rail	73 mm / 2.874 inches

Mechanical data

Mounting type	DIN-35 rail
Mounting position	horizontal (standing/lying); vertical

Material data

Note (material data)	Information on material specifications can be found here
Fire load	1.254 MJ
Weight	93.4 g

Environmental requirements

Ambient temperature (operation at U_N)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +70 °C
Processing temperature	-25 ... +50 °C
Temperature range of connection cable	$\geq (T_{\text{ambient}} + 25 \text{ K})$
Relative humidity	5 ... 85 %
Operating altitude (max.)	2000 m



Standards and Specifications		
Standards/specifications	EN 61010-2-201 EN 61810-1 EN 61373 UL 508 (max. 50 °C)	

Basic relay		
WAGO Basic Relay	858-166	

Commercial data		
Product Group	6 (INTERFACE ELECTRONIC)	
PU (SPU)	5 pcs	
Packaging type	Box	
Country of origin	DE	
GTIN	4055143568203	
Customs tariff number	85364900990	

Product Classification		
UNSPSC	39122334	
eCl@ss 10.0	27-37-16-01	
eCl@ss 9.0	27-37-16-01	
ETIM 9.0	EC001437	
ETIM 10.0	EC001437	
ECCN	NO US CLASSIFICATION	

Environmental Product Compliance		
RoHS Compliance Status	Compliant,No Exemption	

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
		
Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03084
Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 858-308

Download icon

Documentation

Bid Text

858-308	19.02.2019	xml 4.68 KB	Download icon
858-308	20.02.2019	docx 16.82 KB	Download icon

Instruction Leaflet

Stecksocket für Elementarrelais	V 2.0.0 25.01.2022	pdf 2130.02 KB	Download icon
---------------------------------	-----------------------	-------------------	---------------

CAD/CAE-Data

CAD data

2D/3D Models 858-308

Download icon

CAE data

EPLAN Data Portal 858-308

Download icon

WSCAD Universe 858-308

Download icon

ZUKEN Portal 858-308

Download icon

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule



Item No.: 216-241
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



Item No.: 216-242
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Item No.: 216-243
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



Item No.: 216-244
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

1.1.2 Installation

1.1.2.1 Ejector



Item No.: 858-110
Ejector; for basic relays 25 mm x 35 mm

1.1.3 Jumper

1.1.3.1 Jumper



[Item No.: 858-402](#)
Jumper; 2-way; insulated; light blue

1.1.4 Marking

1.1.4.1 Double marker carrier



[Item No.: 209-128](#)
Adaptor; gray

1.1.4.2 Group marker carrier



[Item No.: 249-105](#)
Group marker carrier; gray



[Item No.: 209-145](#)
Group marker carrier; white

1.1.4.3 Marker



[Item No.: 209-183](#)
Marker; white



[Item No.: 793-5501](#)
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



[Item No.: 793-502](#)
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-566](#)
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-503](#)
WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-504](#)
WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-505](#)
WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-506](#)
WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-501](#)
WMB marking card; as card; not stretchable; plain; snap-on type; white



[Item No.: 2009-115](#)
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.1.4.4 Marking device



[Item No.: 210-110](#)
Fiber-tip pen

1.1.4.5 Marking strip



Item No.: 2009-110

Marking strips; for Smart Printer; on reel;
not stretchable; plain; snap-on type; white

1.1.4.6 Protective marker cover



Item No.: 209-184

Protection cover; transparent

1.1.5 Tool

1.1.5.1 Operating tool





Item No.: 210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a
partially insulated shaft

Installation Notes

Commoning



Removing a jumper via screwdriver.

Marking



Marking using WMB Multi markers and
group marker carriers.