


Walraven BISMAT® Flash (M8)

(A0504)

for steel, copper, cast iron and plastic (multilayer) pipe

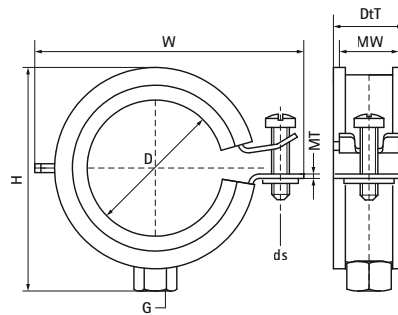

Features & benefits

- single screw clamp
- with Walraven BISMAT® Flash quick locking system
- clamp easy to close with one hand
- the locking screw can be secured without use of tools
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- optimised noise insulation due to soft closing without tools
- tested for fire safety



Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Material Width x Material Thickness	Screw Size	Total Width x Total Height x Total Depth	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	MW x MT	ds	W x H x DtT		Fa,z
Unit description	mm		"		mm x mm		mm x mm x mm		N
3373018	15 - 18	DN 10	3/8	M8	20 x 1	M6	46 x 38 x 25	ETA RAL-GZ 655/B CE RAL-GZ 656 ITB (KOT) ISO 3822-1	500
3373023	20 - 23	DN 15	1/2	M8	20 x 1	M6	51 x 43 x 25	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1	500
3373028	25 - 28	DN 20	3/4	M8	20 x 1	M6	56 x 48 x 25	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1	500
3373035	32 - 35	DN 25	1	M8	20 x 1	M6	63 x 55 x 25	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1	500
3373043	40 - 43	DN 32	1 1/4	M8	20 x 1.25	M6	72 x 63 x 25	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1	700
3373051	48 - 51	DN 40	1 1/2	M8	20 x 1.25	M6	80 x 71 x 25	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1	700
3373056	53 - 56	-	-	M8	20 x 1.25	M6	85 x 76 x 25	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1	700
3373063	57 - 63	DN 50	2	M8	20 x 1.25	M6	91 x 82 x 25	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1	700