

Concord

EXPOSPOT 90 ADJUSTABLE HE RA90 3000K NB WHITE 2070035



Features

- Integrated LED adjustable accent downlight, single head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 25°, optics: aluminium reflector and lens combination, colour temperature: 3000K warm white, total system power: 28W, total fixture output: 2536lm, 91lm/W, LOR: 100%, colour rendering: Ra 90 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 140mm, dimensions: 150x104mm, weight: 0.77kg.

Product Overview


Product name	EXPOSPOT 90 ADJUSTABLE HE RA90 3000K NB WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Fixture luminous flux (lm)	2536
Luminaire efficacy (lm/W)	91
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	28

Concord

EXPOSPOT 90 ADJUSTABLE HE RA90 3000K NB WHITE 2070035

Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Remote
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768700356
Warranty	5 years

Photometry

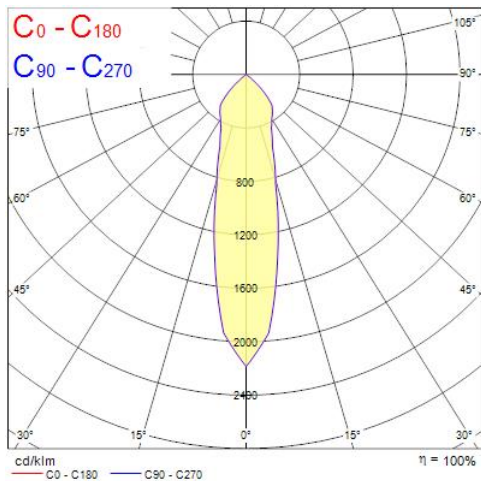

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(12.6°) E(C0)
0.5	0.22	22174	10390
1.0	0.45	5543	2583
1.5	0.67	2454	1148
2.0	0.89	1366	645
2.5	1.12	887	413
3.0	1.34	615	287


Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 25.2°)

Concord

EXPOSPOT 90 ADJUSTABLE HE RA90 3000K NB WHITE 2070035

Technical drawings

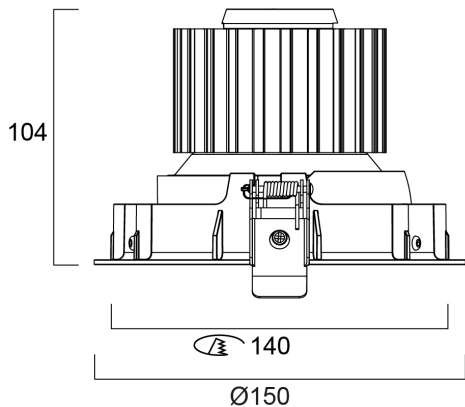

Data table

GENERAL DATA

Product name	EXPOSPOT 90 ADJUSTABLE HE RA90 3000K NB WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2536
Luminaire efficacy (lm/W)	91
LOR (%)	100
Colour temperature (K)	3000

Concord

EXPOSPOT 90 ADJUSTABLE HE RA90 3000K NB WHITE 2070035

Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	28
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.92
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Control gear mounting	Remote
Drive current (mA)	700
Inrush Current (A)	19.4
Inrush Duration (μ s)	250
Glow Wire Test ($^{\circ}$ C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	21
Max. products per 20A B Breaker	27

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	54500

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	150
Nominal Product Diameter (mm)	150

Concord

EXPOSPOT 90 ADJUSTABLE HE RA90 3000K NB WHITE 2070035

Weight (kg)	0.77
Recessed Depth (mm)	104

PACKAGING

Single packaging type	Carton
Product EAN number	5025768700356
Packaging single width (cm)	18.0
Packaging single depth (cm)	16.0
DUN14 (outer)	05025768700356
Packaging outer length / height (cm)	18.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No