

# Concord

## EXPOSPOT 90 ADJUSTABLE HE RA90 3000K NB WHITE 2070035



### Features

- Integrated LED adjustable accent downlight, single head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 25°, optics: aluminium reflector and lens combination, colour temperature: 3000K warm white, total system power: 28W, total fixture output: 2536lm, 91lm/W, LOR: 100%, colour rendering: Ra 90 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 140mm, dimensions: 150x104mm, weight: 0.77kg.

### Product Overview


|  |   |
|--|---|
| <b>Product name</b>                    | EXPOSPOT 90 ADJUSTABLE HE RA90 3000K NB WHITE |
| <b>Technology</b>                      | LED   |
| <b>Cap/Base</b>                        | N/A   |
| <b>Housing</b>                         | Aluminium                                     |
| <b>Mount</b>                           | Ceiling recessed mounting                     |
| <b>Fixture rating</b>                  | Enclosed                                      |
| <b>Fixture luminous flux (lm)</b>      | 2536  |
| <b>Luminaire efficacy (lm/W)</b>       | 91  |
| <b>LOR (%)</b>                         | 100   |
| <b>Colour temperature (K)</b>          | 3000  |
| <b>Light colour</b>                    | Warm White                                    |
| <b>CRI (Ra)</b>                        | 90  |
| <b>Colour Variation Initial (SDCM)</b> | 3   |
| <b>Photobiological Risk Group</b>      | RG1   |
| <b>Total power consumption (W)</b>     | 28  |

# Concord

## EXPOSPOT 90 ADJUSTABLE HE RA90 3000K NB WHITE 2070035

|                       |                    |
|-----------------------|--------------------|
| Electrical protection | Class II           |
| Control gear type     | Electronic ballast |
| Control gear mounting | Remote             |
| Housing colour        | White              |
| IP rating             | IP20               |
| IK rating             | IK02               |
| Product EAN number    | 5025768700356      |
| Warranty              | 5 years            |

### Photometry

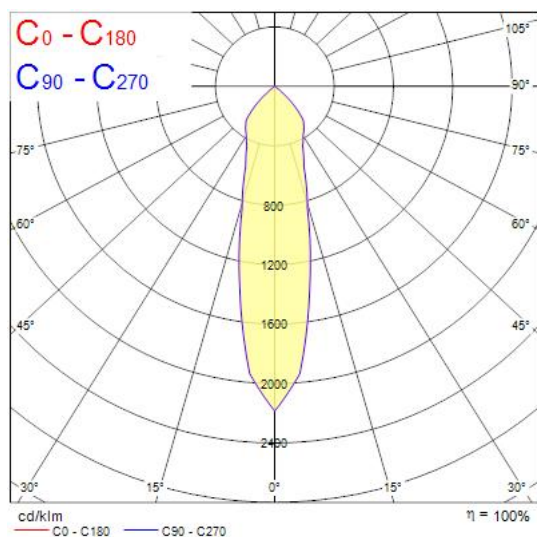

### Technical drawings

