



### Features


- DELTAWING 1500 4K SSC is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1440x160x60mm dimensions, 56W system power, 7,400lm flux and 132lm/W efficacy, CRI (Ra) >80, 4000K (Neutral White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, Sylsmart Standalone enabled, RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.

### Product Overview


<b>Product name</b>	DELTAWING 1500 4K SSC
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate, Steel
<b>Mount</b>	Ceiling surface mounting, Wall surface mounted
<b>Fixture luminous flux (lm)</b>	7400
<b>Luminaire efficacy (lm/W)</b>	132
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	56
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>Housing colour</b>	RAL9003
<b>IP rating</b>	IP44
<b>IK rating</b>	IK06
<b>Product EAN number</b>	5410288429403
<b>Warranty</b>	5 years

Light your world

### Photometry

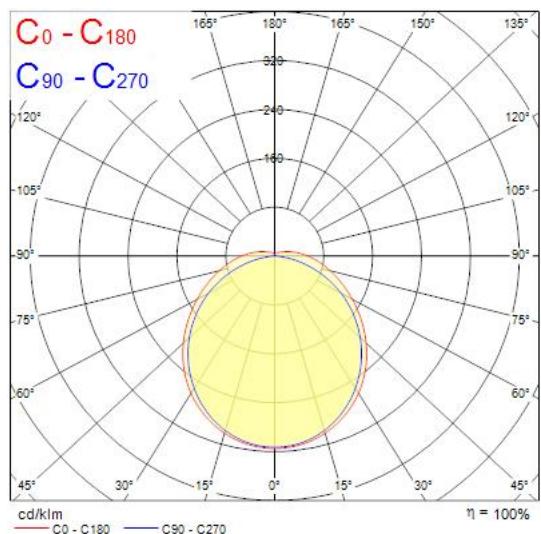

### Technical drawings

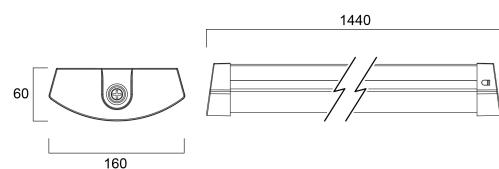

Light your world