



### Features

- DELTAWING 1500 4K MW is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1440x160x60mm dimensions, 55W system power, 7,400lm flux and 135lm/W efficacy, CRI (Ra) >80, 4000K (Neutral White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, non-dimmable driver with built-in MW sensor, RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.

### Product Overview

<b>Product name</b>	DELTAWING 1500 4K MW
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate, Steel
<b>Mount</b>	Ceiling surface mounting, Wall surface mounted
<b>E-number FI</b>	4279353
<b>Fixture luminous flux (lm)</b>	7400
<b>Luminaire efficacy (lm/W)</b>	135
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	55
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>Housing colour</b>	RAL9003
<b>IP rating</b>	IP44

Light your world

IK rating

IK06


Product EAN number

5410288429410


Warranty

5 years

### Photometry

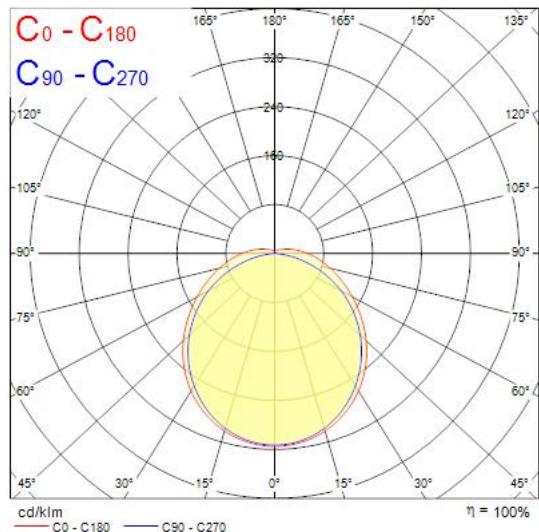

### Technical drawings

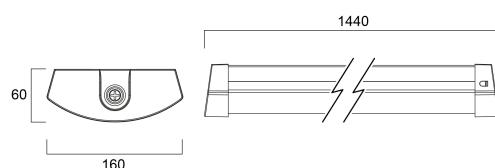

Light your world