


34P-2605-CS: Bend 90° Press swivel adapter with flat sealing 26x3/4"CuSi

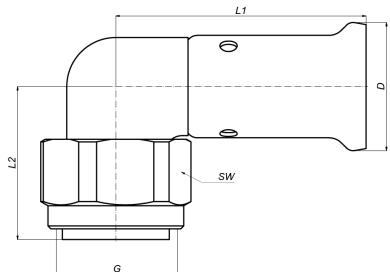

Commercial information

The body of the fitting is made from CW724R brass. These fittings offer great advantages with regard to corrosion and they are also better for the environment.

- The fitting has a buffer ring that prevents direct galvanic contact between the aluminium of the pipe and the brass of the fitting.
- This excludes the possibility of electrolysis occurring.
- The fitting is equipped with O-rings made from EPDM and RVS pressure sleeves with 3 inspection windows.
- In order to prevent assembly errors, the dimensions and type of press profile which can be pressed are shown on the RVS sleeves

Basic unit dimensions

| | |
|------------|----------|
| Height | 55 mm |
| Length | 68 mm |
| Width | 33 mm |
| Net weight | 0.125 kg |

Certificates

KIWA, ATG, DVGW Wasser, ETA, ÖVGW Wasser, WRAS, KOMO, STF, ÖN EN 21003-2/-3, GOST-R, ITC, TSU, QB (CSTBat), AFNOR, ACS, PZH, DNV-GL, EMI

Applications

Potable water, Heating, Cooling, Compressed air, Sanitary

Solutions

Building installations, Industry, Utility, Shipbuilding

Technical characteristics

| | | | |
|------------------------------------|--|----------------------------------|------------------------|
| Material connection 1 | Brass | Bend radius | 26 Millimetre |
| Surface protection connection 1 | Untreated | Outer pipe diameter connection 1 | 26 Millimetre |
| Surface treatment connection 1 | Untreated | Length | 68 Millimetre |
| Material connection 2 | Brass | Length of connection 1 | 34 Millimetre |
| Surface protection connection 2 | Untreated | Working length connection 1 | 34 Millimetre |
| Surface treatment connection 2 | Untreated | Length of connection 2 | 29 Millimetre |
| Shape | Bend | Working length connection 2 | 29 Millimetre |
| Reducing | ✗ | Wrench width | 0 Millimetre |
| Eccentric | ✗ | Wrench width union nut | 0 Millimetre |
| System specific | ✓ | Medium temperature (continuous) | -10 70 Degrees celsius |
| Connection 1 | Press sleeve | Max. operating pressure at 20 °C | 16 Bar |
| Contour code connection 1 | TH | Standard Dimension Ratio (SDR) | 0 |
| Nominal diameter connection 2 | 3/4 inch (20) | | |
| Connection 2 | Union nut | | |
| Main colour fitting | Brass | | |
| Material sealing | Ethylene-propylene diene monomer rubber (EPDM) | | |
| With buffer stud | ✓ | | |
| High tensile strength | ✗ | | |
| With thermal insulation | ✗ | | |
| Ring stiffness class | Other | | |
| With sealing rings/gaskets | ✓ | | |
| Capped | ✗ | | |
| With drain valve | ✗ | | |
| With de-aerator | ✗ | | |
| FM quality mark | ✗ | | |
| LPCB quality mark | ✗ | | |
| ULC quality mark | ✗ | | |
| UL quality mark | ✗ | | |
| DIN-CERTCO certificate | ✗ | | |
| VdS quality mark | ✗ | | |
| With approval for TÜV | ✗ | | |
| DVGW quality mark for gas | ✗ | | |
| DVGW quality mark for water | ✓ | | |
| KIWA certified | ✓ | | |
| Gastec QA mark | ✗ | | |
| KOMO certified | ✓ | | |
| Type approval according to BBR/EKS | ✗ | | |