


Concord

BEACON 93CRI 3K WIDE BEAM L3 ON-BOARD DIM WHITE 2059631

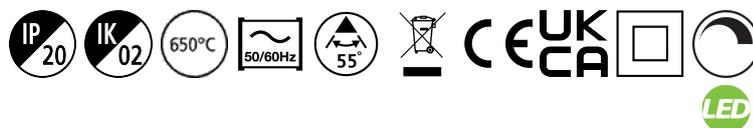

Features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 55° wide beam, optics: Aluminium reflector, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1700lm, luminaire efficacy: 81lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, dimmable via on-board potentiometer, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x190mm, weight: 0.96kg.

Product Overview


| | |
|-----------------------------------|---|
| Product name | BEACON 93CRI 3K WIDE BEAM L3 ON-BOARD DIM WHITE |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Track mounting |
| Environment | Internal |
| General application | Museums & Galleries, Retail |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 1700 |
| Luminaire efficacy (lm/W) | 81 |
| LOR (%) | 100 |
| Correlated colour temperature (k) | 3000 |

Concord

BEACON 93CRI 3K WIDE BEAM L3 ON-BOARD DIM WHITE 2059631

| | |
|-----------------------------|--------------------|
| Light colour | Warm White |
| CRI (Ra) | 93 |
| Colour Consistency (SDCM) | 3 |
| Beam Angle (°) | 55 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 21 |
| Electrical protection | Class II |
| Control gear type | Electronic ballast |
| Minimum dimming level (%) | 5 |
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768596317 |
| Warranty | 5 years |
| Dimming method | 1-10V (Analogue) |
| Useful luminous flux (#use) | 1700 |

Photometry

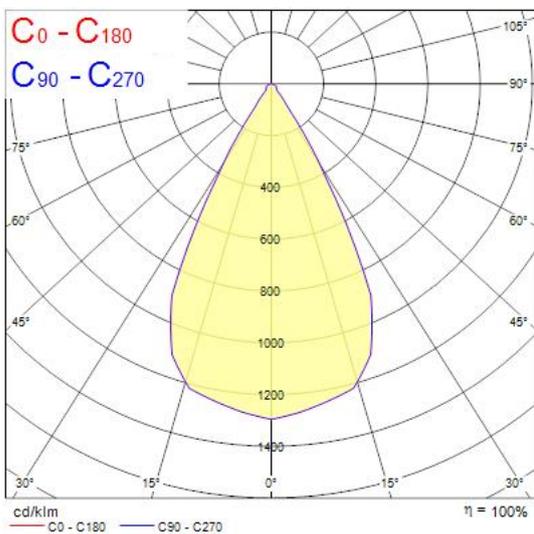

Technical drawings

