

Walraven Expansion Device 2-L

(E1025)

fixing with sliding assemblies



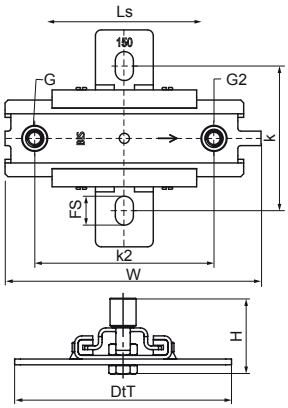

Features & benefits

- double brackets for accommodation of pipe thermal expansion or contraction
- fix directly on the building structure or in combination with rail systems
- suitable for ceiling mounting (suspended) and floor mounting (standing mounted)
- a variety of connection possibilities, can be combined with all pipe clamps
- friction coefficient μ = 0.18; Sliding friction coefficient μ = 0.14
- material: metal parts made of steel 1.0332; plastic parts made of PA (polyamide)
- zinc plated
- temperature resistance up to +120 °C
- max. allowed load: standing = Fa,z; suspended = Fa,z 2
- double version suitable for pipes >= DN 200

Productnumber	Connection Thread	Connection Thread 2	Total Height	Total Width	Total Depth	Fixing Slot	Heart To Heart Distance	Heart To Heart Distance 2	Slide Distance	Maximum Allowed Load Faz	Maximum Allowed Load Faz 2
Reference Letter	*G*	*G2*	*H*	*W*	*DtT*	*FS*	*k*	*k 2*	*Ls*	*Fa,z*	*Fa,z2*
Unit description			*mm*	*mm*	*mm*	*mm*	*mm*	*mm*	*mm*	*N*	*N*
6663210	M10/M12	M10/M12	52	177	150	20x12.5	100	124	140	2,300	2,300