


Walraven VibraTek® MS-M Spring Mount

(L20503)

compact spring isolator for light equipment

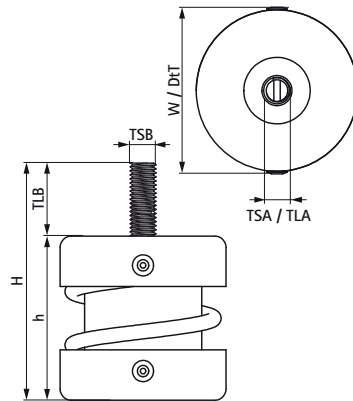

Features & benefits

- low-rise spring isolator with M8 external thread for light equipment or tight spaces
- recommended for machinery with working speeds above 1000 rpm
- steel frame attached to spring mechanically with metal rivets
- average ratio $K_x / K_z = K_y / K_z = 1.3$
- working temperature range $-90\text{ }^{\circ}\text{C}$ till $200\text{ }^{\circ}\text{C}$
- material: steel
- zinc plated

Product Number	Total Width x Total Height x Total Depth	Height	Thread Size A	Thread Length A	Thread Size B	Thread Length B	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter	$W \times H \times DtT$	h	TSA	TLA	TSB	TLB			12
Unit description	mm x mm x mm	mm		mm		mm	N	N	mm
2800200150	51 x 73 x 51	50.5	M8	6.3	M8	22.5	30	140	12
2800200250	51 x 73 x 51	50.5	M8	6.3	M8	22.5	50	230	12
2800200500	51 x 73 x 51	50.5	M8	6.3	M8	22.5	100	450	12
2800200750	51 x 73 x 51	50.5	M8	6.3	M8	22.5	150	680	12
2800201000	51 x 73 x 51	50.5	M8	6.3	M8	22.5	200	980	12