

Walraven VibraTek® SA-3 Silent Absorber

(L20554)


silent rubber absorber for isolating metal to metal contact



2801100300



2801100450

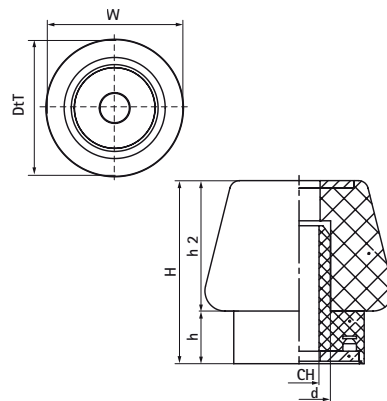

Features & benefits

- formed of two rubber parts which fit into each other, making it suitable for various fixing plate thicknesses
- ideal isolation of HVAC equipment
- for use with M8 threaded rods
- a versatile viscoelastic two-piece rubber absorber for preventing metal-to-metal contact in joined or fastened surfaces
- simple installation
- prevents transmission of vibration and noise
- working temperature range -10 °C till 45 °C

Product Number	Total Width x Total Height x Total Depth	Height	Height 2	Connection Hole Diameter		Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter	W x H x DtT	h	h 2	CH	d			7
Unit description	mm x mm x mm	mm	mm	mm	mm	N	N	mm
2801100300	37.5 x 36.5 x 37.5	10.5	26	8	12.5 - 37.5	5	200	7
2801100450	37.5 x 36.5 x 37.5	10.5	26	8	12.5 - 37.5	10	400	7