


Walraven VibraTek® SA-2 Silent Absorber

(L20551)

silent rubber absorber for isolating metal to metal contact

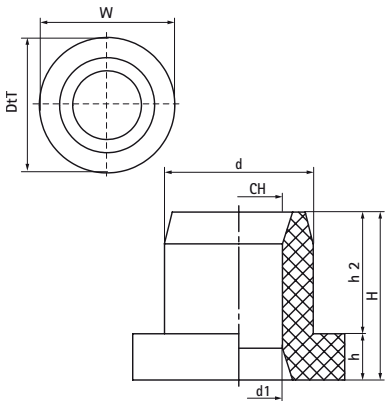

Features & benefits

- a versatile viscoelastic rubber absorber for preventing metal-to-metal contact in joined or fastened surfaces
- simple installation
- with Ø 14mm hole for use with M10 and M12 threaded rods
- prevents transmission of vibration and noise
- working temperature range -10 °C till 45 °C

Product Number	Total Width x Total Height x Total Depth	Height	Height 2	Connection Hole Diameter	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection	
Reference letter	W x H x DtT	h	h 2	CH	d		3	
Unit description	mm x mm x mm	mm	mm	mm	mm	N	mm	
2801000300	33.5 x 26.5 x 33.5	7.3	19.2	14	12.5	10	250	3