


Walraven VibraTek® SA-1 Silent Absorber

(L20548)

silent rubber absorber for isolating metal to metal contact

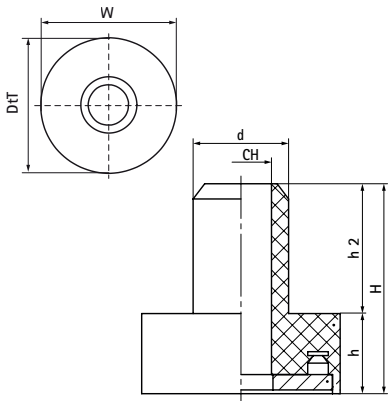

- Features & benefits
- a versatile viscoelastic rubber absorber for preventing metal-to-metal contact in joined or fastened surfaces
 - simple installation
 - with Ø 8mm hole for use with M8 threaded rods
 - prevents transmission of vibration and noise
 - working temperature range -10 °C till 45 °C

Product Number	Total Width x Total Height x Total Depth	Height	Height 2	Connection Hole Diameter		Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter	W x H x DtT	h	h 2	CH	d			3
Unit description	mm x mm x mm	mm	mm	mm	mm	N	N	mm
2800900300	26 x 27.5 x 26	10.5	17	8	12.5	10	180	3