

Data Sheet | Item Number: 267-114


Female connector; without ground contact; with snap-in mounting feet; 4-pole; 1,00 mm²; white

<https://www.wago.com/267-114>



Color:   white

Similar to illustration

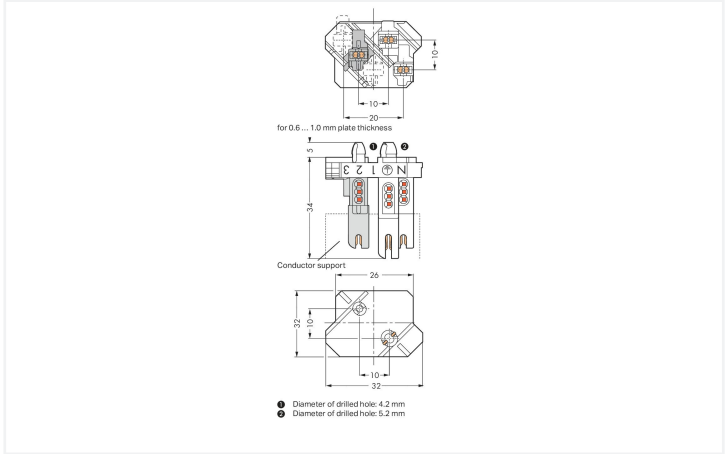

Dimensions in mm  
1) Diameter of drilled hole: 4.2 mm  
2) Diameter of drilled hole: 5.2 mm

- Flexible, modular 5- to 11-pole connector system
- Future system expansions possible
- Compact design

Electrical data

| Ratings per          | IEC/EN 60664-1 |       |    |
|----------------------|----------------|-------|----|
| Overvoltage category | III            | III   | II |
| Pollution degree     | 3              | 2     | 2  |
| Nominal voltage      | -              | 500 V | -  |
| Rated surge voltage  | -              | 4 kV  | -  |
| Rated current        | -              | 6 A   | -  |

Connection data

|                            |   |              |                    |
|----------------------------|---|--------------|--------------------|
| Number of connection types | 1 | Connection 1 |                    |
|                            |   | Strip length | 8 mm / 0.31 inches |
|                            |   | Pole number  | 4                  |

Physical data

|                         |                      |
|-------------------------|----------------------|
| Width                   | 32 mm / 1.26 inches  |
| Height from the surface | 34 mm / 1.339 inches |
| Depth                   | 32 mm / 1.26 inches  |



| Material data               |                                                                                                                        |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------|
| Note (material data)        | <a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a> |
| Color                       | white                                                                                                                  |
| Material group              | I                                                                                                                      |
| Insulation material         | Polyamide (PA66)                                                                                                       |
| Flammability class per UL94 | V0                                                                                                                     |
| Clamping spring material    | Chrome-nickel spring steel (CrNi)                                                                                      |
| Contact material            | Electrolytic copper (E <sub>Cu</sub> )                                                                                 |
| Contact plating             | Tin                                                                                                                    |
| Fire load                   | 0.28 MJ                                                                                                                |
| Weight                      | 7.3 g                                                                                                                  |

| Environmental requirements       |                 |
|----------------------------------|-----------------|
| Processing temperature           | -35 ... +85 °C  |
| Continuous operating temperature | -60 ... +105 °C |
| Temperature stability            | 105 °C          |

| Commercial data       |                                |
|-----------------------|--------------------------------|
| Product Group         | 8 (Misc. Chassis Mount Blocks) |
| eCl@ss 10.0           | 27-44-03-14                    |
| eCl@ss 9.0            | 27-44-03-14                    |
| ETIM 8.0              | EC000458                       |
| ETIM 7.0              | EC000458                       |
| PU (SPU)              | 500 pcs                        |
| Packaging type        | Bag                            |
| Country of origin     | PL                             |
| GTIN                  | 4044918499507                  |
| Customs tariff number | 85366990990                    |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

Approvals / Certificates

General approvals



| Approval                                     | Standard | Certificate Name |
|----------------------------------------------|----------|------------------|
| CCA<br>DEKRA Certification B.V.              | EN 61984 | NL-47718         |
| KEMA/KEUR<br>DEKRA Certification B.V.        | EN 61984 | 71-100641        |
| UL<br>UL International Germany GmbH          | UL 1977  | E45171           |
| VDE<br>VDE Prüf- und Zertifizierungsinstitut | EN 61984 | 40032309         |



| Downloads                                |  |  |                   |
|------------------------------------------|--|--|-------------------|
| Environmental Product Compliance         |  |  |                   |
| Compliance Search                        |  |  |                   |
| Environmental Product Compliance 267-114 |  |  | <a href="#">↓</a> |

| Documentation          |            |                   |                   |
|------------------------|------------|-------------------|-------------------|
| Additional Information |            |                   |                   |
| Technical Section      | 03.04.2019 | pdf<br>2010.85 KB | <a href="#">↓</a> |

| CAD/CAE-Data         |                   |                           |                   |
|----------------------|-------------------|---------------------------|-------------------|
| CAD data             |                   | CAE data                  |                   |
| 2D/3D Models 267-114 | <a href="#">↓</a> | EPLAN Data Portal 267-114 | <a href="#">↓</a> |
|                      |                   | ZUKEN Portal 267-114      | <a href="#">↓</a> |