


17SKS-2605: Straight male adapter 26x3/4"

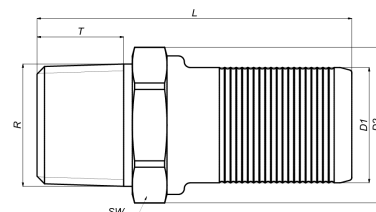

Commercial information

The supply and feed-through of Henco plastic manifolds can be fitted with male (17SKS) or female (18SKS) straight adapters. These adapters are made from brass. Only combinations with Henco Vision push-fit fittings with a diameter of 20 or 26 mm are possible.

Basic unit dimensions

Height	34 mm
Length	56 mm
Width	34 mm
Net weight	0.117 kg

Certificates

KOMO

Applications

Potable water, Heating, Cooling, Sanitary

Solutions

Building installations, Industry, Utility

Technical characteristics

Material connection 1	Brass	Bend radius	0 Millimetre
Material quality connection 1	CuZn40Pb2 (CW617N)	Outer pipe diameter connection 1	26 Millimetre
Surface protection connection 1	Untreated	Length	56 Millimetre
Surface treatment connection 1	Untreated	Wrench width	0 Millimetre
Material connection 2	Brass	Wrench width union nut	0 Millimetre
Material quality connection 2	CuZn40Pb2 (CW617N)	Medium temperature (continuous)	-10 70 Degrees celsius
Surface protection connection 2	Untreated	Max. operating pressure at 20 °C	10 Bar
Surface treatment connection 2	Untreated	Standard Dimension Ratio (SDR)	0
Shape	Straight		
Reducing	✗		
Eccentric	✗		
System specific	✓		
Connection 1	Soldered end		
Nominal diameter connection 2	3/4 inch (20)		
Connection 2	External thread conical BSPT-R (ISO 7-1 / EN 10226-1)		
Main colour fitting	Brass		
Material sealing	Ethylene-propylene diene monomer rubber (EPDM)		
With buffer stud	✓		
High tensile strength	✗		
With thermal insulation	✗		
Ring stiffness class	Other		
With sealing rings/gaskets	✗		
Capped	✗		
With drain valve	✗		
With de-aerator	✗		
FM quality mark	✗		
LPCB quality mark	✗		
ULC quality mark	✗		
UL quality mark	✗		
DIN-CERTCO certificate	✗		
VdS quality mark	✗		
With approval for TÜV	✗		
DVGW quality mark for gas	✗		
DVGW quality mark for water	✗		
KIWA certified	✗		
Gastec QA mark	✗		
KOMO certified	✓		
Type approval according to BBR/EKS	✗		