

Data Sheet | Item Number: 267-175


Female connector; with direct ground contact; with snap-in mounting feet; 5-pole;
1,00 mm²; white

<https://www.wago.com/267-175>



Color: white

Similar to illustration

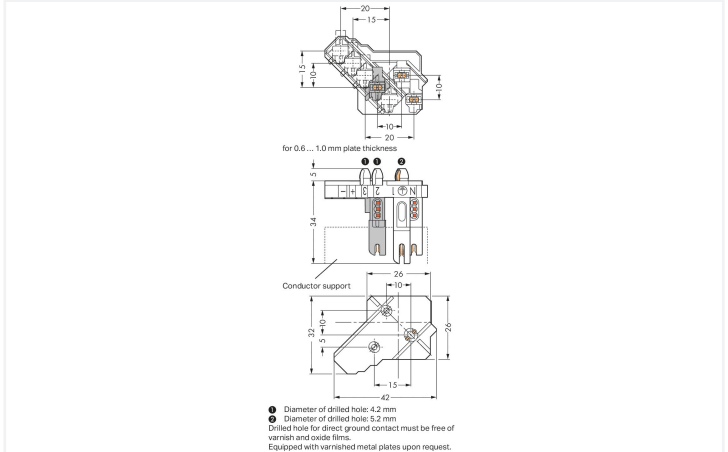

Dimensions in mm
1) Diameter of drilled hole: 4.2 mm
2) Diameter of drilled hole: 5.2 mm
Drilled hole for direct PE contact must be free of varnish and oxide films. Equipped with varnished metal plates upon request.

- Flexible, modular 5- to 11-pole connector system
- Future system expansions possible
- Compact design

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated surge voltage	-	4 kV	-
Rated current	-	6 A	-

Connection data

Number of connection types	1	Connection 1	
		Connection technology	PUSH WIRE®
		Strip length	8 mm / 0.31 inches
		Pole number	5

Physical data

Width	26 mm / 1.024 inches
Height from the surface	34 mm / 1.339 inches
Depth	42 mm / 1.654 inches



Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.407 MJ
Weight	10.1 g

Environmental requirements	
Temperature stability	105 °C

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	250 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4044918499798
Customs tariff number	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 267-175			↓

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2010.85 KB	↓

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 267-175		EPLAN Data Portal 267-175	↓
		ZUKEN Portal 267-175	↓