


Data Sheet | Item Number: 788-516


Relay module; Nominal input voltage: 230 VAC; 2 changeover contacts; Limiting continuous current: 8 A; Red status indicator; Module width: 15 mm; 2,50 mm²; gray




<https://www.wago.com/788-516>

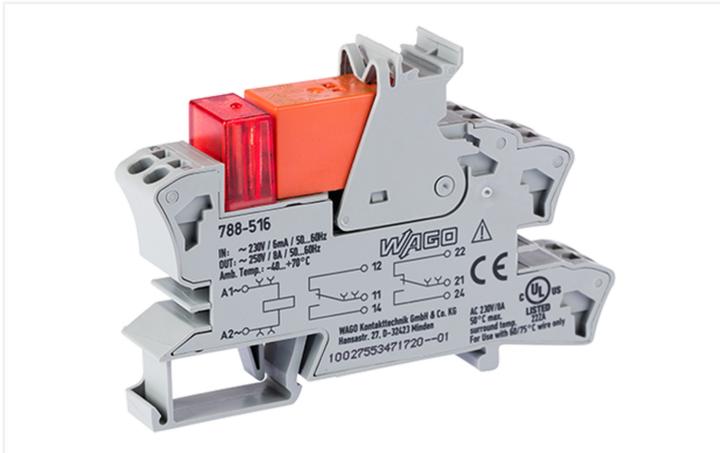



Color: ■ gray

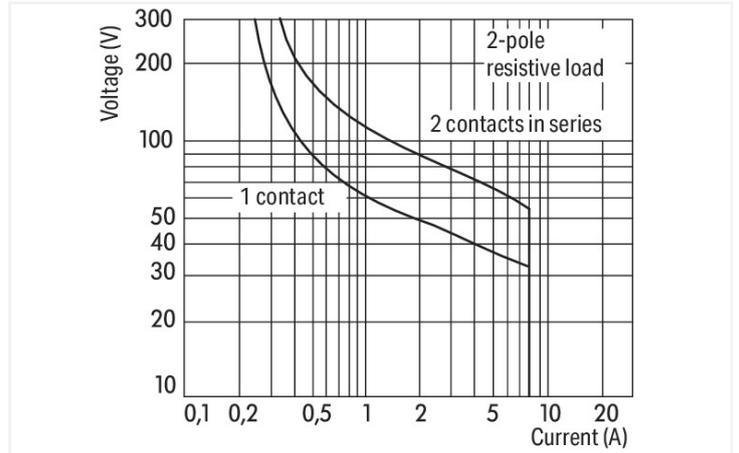

DC load limit curve

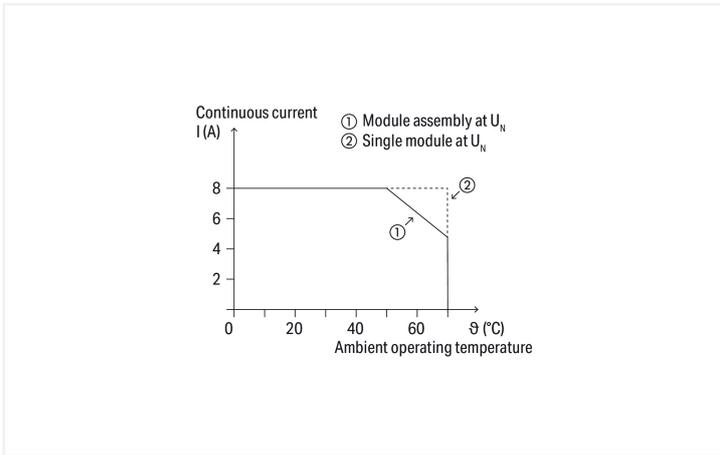

Current-carrying capacity curve

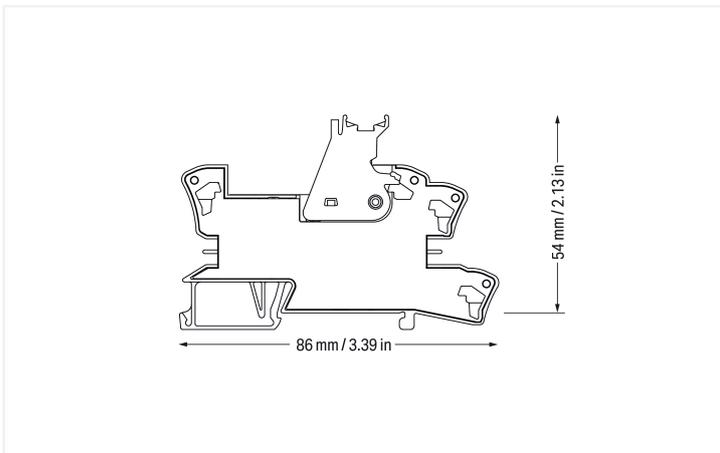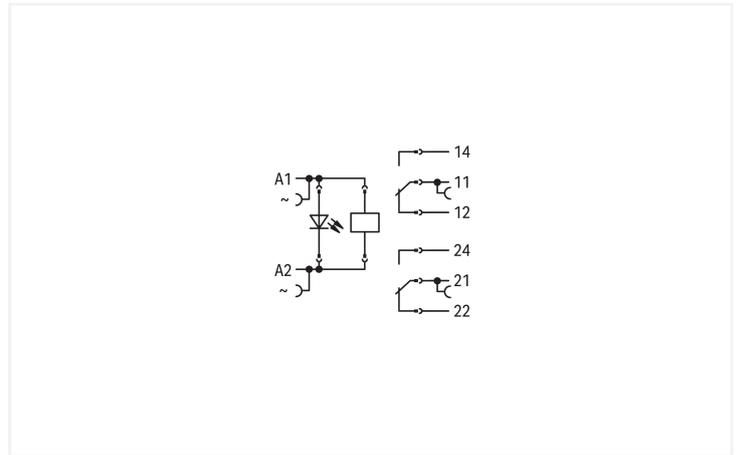

Notes

| | |
|--------------------|--|
| Safety Information | A separator plate (e.g., 209-191) must be used for voltages exceeding 250 V between adjacent relay modules and to comply with reinforced insulation requirements. |
| Note | Reinforced insulation between coil and contacts To protect the relay coils and contacts, inductive loads must be dampened with an effective protection circuit. |

Technical data

Control circuit

| | |
|--------------------------------|------------|
| Nominal input voltage U_N | 230 VAC |
| Input voltage range | $\pm 10\%$ |
| Nominal input current at U_N | 4 mA |

Load circuit

| | |
|--|--|
| Number of changeover/switchover contacts | 2 |
| Contact material (relay) | AgNi 90/10 |
| Limiting continuous current | 8 A |
| Inrush current (resistive) max. | (AC) 15 A / 4 s |
| Switching Voltage, Max. | 250 VAC |
| Switching power (resistive) max. | AC 2000 VA; DC (see load limit curve) |
| Switching capacity | AC-15: 3 A / 250 VAC; DC-13: 2 A / 24 VDC |
| Recommended minimum load | 12 V / 10 mA |
| Pull-in time (typ.) | 10 ms |
| Drop-out time (typ.) | 35 ms |
| Bounce time (typ.) | 10 ms |
| Electrical life (NO; resistive load; 23 °C) | 10×10^3 switching operations |
| Mechanical life | 30×10^6 switching operations |
| Switching frequency with/without load (max.) | 6 min^{-1} / 1200 min^{-1} |

Signaling

| | |
|------------------|---------|
| Status indicator | Red LED |
|------------------|---------|

Safety and protection

| | |
|--|---|
| Rated Voltage | 250 V |
| Rated impulse withstand voltage | 4 kV |
| Pollution degree | 3 |
| Dielectric strength (control/load circuit) (AC, 1 min) | 5 kVrms |
| Dielectric strength (open contact) (AC, 1 min) | 1 kVrms |
| Dielectric strength (load/load circuit) (AC, 1 min) | 2.5 kVrms |
| Safety Information | A separator plate (e.g., 209-191) must be used for voltages exceeding 250 V between adjacent relay modules and to comply with reinforced insulation requirements. |
| Protection type | IP20 |

Connection Data

| | |
|-------------------------|--|
| Connection technology | Push-in CAGE CLAMP® |
| Solid conductor | 0.34 ... 2.5 mm ² / 22 ... 14 AWG |
| Fine-stranded conductor | 0.34 ... 2.5 mm ² / 22 ... 14 AWG |
| Strip length | 9 ... 10 mm / 0.35 ... 0.39 inches |

Physical data

| | |
|-----------------------------------|----------------------|
| Width | 15 mm / 0.591 inches |
| Height | 86 mm / 3.386 inches |
| Depth from upper-edge of DIN-rail | 54 mm / 2.126 inches |

Mechanical data

| | |
|---------------|-------------|
| Mounting type | DIN-35 rail |
|---------------|-------------|

Material data

| | |
|----------------------|--|
| Note (material data) | Information on material specifications can be found here |
| Color | gray |
| Fire load | 0.839 MJ |
| Weight | 45.7 g |

Environmental requirements

| | |
|--|--|
| Ambient temperature (operation at U_N) | -40 ... +70 °C |
| Ambient temperature UL (operation at U_N) | -40 ... +50 °C |
| Ambient temperature (storage) | -40 ... +70 °C |
| Processing temperature | -25 ... +50 °C |
| Temperature range of connection cable | $\geq (T_{\text{ambient}} + 20 \text{ K})$ |

Standards and Specifications

| | |
|--------------------------|---|
| Standards/specifications | EN 61010-2-201 EN 61810-1 EN 61373 UL 508 DNV |
|--------------------------|---|

Basic relay

| | |
|------------------|---------|
| WAGO Basic Relay | 788-180 |
|------------------|---------|

Commercial data

| | |
|-----------------------|--------------------------|
| Product Group | 6 (INTERFACE ELECTRONIC) |
| PU (SPU) | 20 (1) pcs |
| Packaging type | Box |
| Country of origin | CN |
| GTIN | 4055143192378 |
| Customs tariff number | 85364900990 |

Product Classification

| | |
|-------------|----------------------|
| UNSPSC | 39122334 |
| eCl@ss 10.0 | 27-37-16-01 |
| eCl@ss 9.0 | 27-37-16-01 |
| ETIM 9.0 | EC001437 |
| ETIM 10.0 | EC001437 |
| ECCN | NO US CLASSIFICATION |

Environmental Product Compliance

| | |
|---|---|
| CAS-No. | 7439-92-1 7440-43-9 79-94-7 |
| REACH Candidate List Substance | 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol Cadmium Lead |
| RoHS Compliance Status | Compliant,With Exemption |
| RoHS Exemption | 7(a) |
| SCIP notification number (Austria) | b0e534fc-6e2a-476f-af3a-adc4f5ad784e |
| SCIP notification number (Belgium) | f5fb74a2-c3b0-40c0-98da-03976d135990 |
| SCIP notification number (Bulgaria) | 19a69d1f-1eac-4af1-a82f-60b7cd39e307 |
| SCIP notification number (Czech Republic) | e9ac98ec-36be-424b-bf0a-c385a9fb437c |
| SCIP notification number (Denmark) | 97398917-a0b9-438b-a009-ec705113136d |
| SCIP notification number (Finland) | 6d5f6774-30bf-43ed-a808-bbc48db312c5 |
| SCIP notification number (France) | 33f68cdd-e88a-4b75-9ddb-b9542e5e979b |
| SCIP notification number (Germany) | e244a908-f765-40c7-b634-d9738f4d9568 |
| SCIP notification number (Hungary) | 62cbd900-173a-420f-aa49-b0385499542a |
| SCIP notification number (Italy) | 30a343f2-20a6-4847-a57e-6c4f35c2ab5b |
| SCIP notification number (Netherlands) | a241131d-fb8e-47da-99b3-176d01cbd59d |
| SCIP notification number (Poland) | 18110e8e-0396-4ae3-9bcd-6399915f98d2 |
| SCIP notification number (Romania) | 4c1827a3-594e-47e5-93c0-87c8cd85c0df |
| SCIP notification number (Sweden) | a63b4428-d34d-484d-b9de-d06779aecb17 |

Approvals / Certificates

General approvals **Declarations of conformity and manufacturer's declarations**



| Approval | Standard | Certificate Name |
|--|----------------|---------------------|
| EAC GZO Almaty Standart | TP TC 004/2011 | EAC CoC 03084 |
| UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS) | UL 508 | E175199 Vol.1 Sec.6 |

| Approval | Standard | Certificate Name |
|--|----------|------------------|
| EU-Declaration of Conformity WAGO GmbH & Co. KG | - | - |

Approvals for marine applications



| Approval | Standard | Certificate Name |
|-------------------------|------------------------|------------------|
| DNV DNV Germany GmbH | DNV-CG-0339, Aug. 2021 | TAA00001D1 |

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 788-516



Documentation

Bid Text

| | | | |
|---------|------------|------------------|--|
| 788-516 | 19.02.2019 | xml 4.60 KB | |
| 788-516 | 25.01.2019 | docx 16.43 KB | |

Instruction Leaflet

| | | | |
|------------------------------------|-----------------------|-------------------|--|
| Sockets with Elementary Relay/ SSR | V 1.0.1 09.10.2020 | pdf 2271.22 KB | |
|------------------------------------|-----------------------|-------------------|--|

CAD/CAE-Data

CAD data

2D/3D Models 788-516



CAE data

| | |
|---------------------------|--|
| EPLAN Data Portal 788-516 | |
| WSCAD Universe 788-516 | |
| ZUKEN Portal 788-516 | |

1 Compatible Products

1.1 Optional Accessories

1.1.1 Basic relay

1.1.1.1 Basic relay



[Item No.: 788-180](#)

Basic relay; Nominal input voltage: 230 VAC; 2 changeover contacts; Limiting continuous current: 8 A; Module width: 13 mm; Module height: 15 mm

1.1.2 Ferrule

1.1.2.1 Ferrule



[Item No.: 216-241](#)

Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



[Item No.: 216-242](#)

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



[Item No.: 216-243](#)

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



[Item No.: 216-244](#)

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



[Item No.: 216-542](#)

Twin ferrule; Sleeve for 2 x 1 mm² / AWG 2 x 18; red, insulated; 12 mm long; red

1.1.3 Filter module

1.1.3.1 Suppressor module



Item No.: 788-148

Filter module; RC filter element; Nominal voltage: 230 VAC

1.1.4 Indicators

1.1.4.1 Status indication



Item No.: 788-125

Accessories for relay modules; Operation status indicator: red

1.1.5 Jumper

1.1.5.1 Jumper



Item No.: 788-118

Jumper; for jumper slot; 2-way; from 1 to 3; insulated; light gray



Item No.: 788-113

Jumper; for jumper slot; 2-way; insulated; light gray



Item No.: 859-402

Jumper; for jumper slot; 2-way; insulated; light gray



Item No.: 788-114

Jumper; for jumper slot; 3-way; insulated; light gray



Item No.: 788-115

Jumper; for jumper slot; 4-way; insulated; light gray



Item No.: 788-116

Jumper; for jumper slot; 6-way; insulated; light gray



Item No.: 788-117

Jumper; for jumper slot; 8-way; insulated; light gray

1.1.6 Marking

1.1.6.1 Double marker carrier



Item No.: 209-128

Adaptor; gray

1.1.6.2 Group marker carrier



Item No.: 249-105

Group marker carrier; gray



Item No.: 209-145

Group marker carrier; white

1.1.6.3 Marker



Item No.: 209-183

Marker; white

Item No.: 793-502

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

Item No.: 793-503

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white

Item No.: 793-504

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-505

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white

Item No.: 793-501

WMB marking card; as card; not stretchable; plain; snap-on type; white

Item No.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.1.6.4 Marking device



Item No.: 210-110

Fiber-tip pen

1.1.6.5 Marking strip



Item No.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.1.6.6 Protective marker cover



Item No.: 209-184

Protection cover; transparent

1.1.7 Tool

1.1.7.1 Operating tool




Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination



Conductor termination

Commoning



Easy commoning using adjacent jumpers

Marking



Marking using WMB Multi markers and group marker carriers.