

### Features

- Surface or Suspended LED Linear luminaire with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1160x187x47mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 1130x165mm, Constant Current, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 6000lm, 52W, 115lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m<sup>2</sup>, Lumen Maintenance: L90B10 at 50,000 hours, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.


### Product Overview

<b>Product name</b>	RANA LED S 1200 HO 4K LOUV+PRI W GEN2
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling surface mounting, Suspended
<b>General application</b>	Office, Hospitality, Retail, Education
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4273665
<b>Fixture luminous flux (lm)</b>	6000
<b>Luminous flux (lm)</b>	6000
<b>Luminaire efficacy (lm/W)</b>	115
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 19
<b>Photobiological Risk Group</b>	RG0

Light your world

Total power consumption (W)	52
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288514918
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	6000

## Photometry

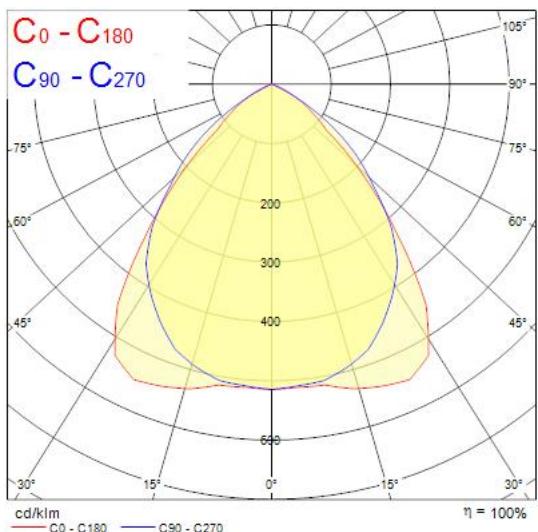

## Technical drawings

