


Walraven Duplo KS

(C1055)

for heating pipes

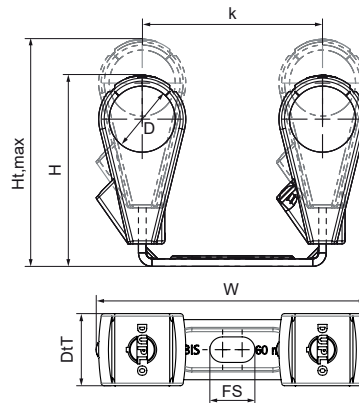

Features & benefits

- two clamps on connection bracket
- clamps can be repositioned when open or closed - only fixed when finally secured
- plastic clamp prevents noises which arise from expansion or contraction of the pipe
- adjustable distance between pipe and wall
- locking screw connected to band, which makes it impossible to lose screw
- material: connection bracket made of steel; connector made of PP (polypropylene)
- fire class B2
- recyclable, resistant to UV and ageing
- zinc plated
- temperature resistance from approx. -30 °C to approx. +90 °C (constant); short to approx. +110 °C

EPD

| Product Number | Total Height | Total Width | Total Depth | Maximum Height | Fixing Slot | Heart To Heart Distance | Max. Wall Distance Center Clamp | Min. Wall Distance Center Clamp | Maximum Allowed Load Faz | Maximum Allowed Load Fax |
|------------------|--------------|-------------|-------------|----------------|-------------|-------------------------|---------------------------------|---------------------------------|--------------------------|--------------------------|
| Reference letter | H | W | DtT | Ht,max | FS | k | | | Fa,z | Fa,x |
| Unit description | mm | mm | mm | mm | mm | mm | mm | mm | N | N |
| 3225015 | 56 | 85 | 24 | 69 | 15x8,5 | 60 | 57 | 57 | 220 | 130 |
| 3225022 | 64 | 92 | 24 | 76 | 15x8,5 | 60 | 61 | 64 | 220 | 130 |