

Data Sheet | Item Number: 267-304


Conductor support; with direct ground contact; with snap-in mounting feet; 4-pole;
2,50 mm²; white

<https://www.wago.com/267-304>



Color: white

Similar to illustration

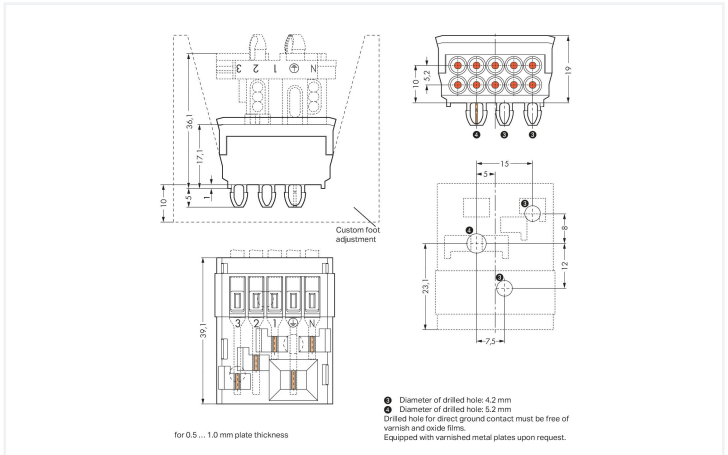

Dimensions in mm
3) Drilled hole diameter: 4.2 mm
4) Drilled hole diameter: 5.2 mm
Drilled hole for direct PE contact must be free of varnish and oxide films.
Equipped with varnished metal plates upon request.

- Flexible, modular 5- to 11-pole connector system
- Future system expansions possible
- Compact design

Electrical data

Ratings per	IEC/EN 60664-1			Ratings per IEC/EN 2	
Overvoltage category	III	III	II	Rated current 2	6 A
Pollution degree	3	2	2		
Nominal voltage	-	500 V	-		
Rated surge voltage	-	4 kV	-		
Rated current	-	16 A	-		

Connection data

Number of connection types	1	Connection 1	
		Strip length	11 ... 12 mm / 0.43 ... 0.47 inches
		Pole number	4

Physical data

Width	39.1 mm / 1.539 inches
Height from the surface	19 mm / 0.748 inches

Material data		
Note (material data)		Information on material specifications can be found here
Color		white
Material group		I
Insulation material		Polyamide (PA66)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Electrolytic copper (E _{Cu})
Contact plating		Tin
Fire load		0.111 MJ
Weight		17.9 g

Environmental requirements		
Temperature stability		105 °C

Commercial data		
eCl@ss 10.0		27-44-03-14
eCl@ss 9.0		27-44-03-14
ETIM 8.0		EC000458
ETIM 7.0		EC000458
PU (SPU)		50 pcs
Packaging type		Box
Country of origin		PL
GTIN		4045454415426
Customs tariff number		85366990990

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 267-304			

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2010.85 KB	

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 267-304 	ZUKEN Portal 267-304 