

### Features

- Simple and slick integral design. Extremely precise light beams due to the high-quality lenses. Easily replaceable lens system, die-cast aluminium body, beam angle: 36°, and 54° beam angle included in the packaging, Textured white finishing colour. Light color temperature: 2700-3000-4000K, 3-CCT switch on the housing of the product, System power: 27W, Fixture lumen output: 3150lm, efficacy: 117lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation, Operating voltage 220-240V / 50-60Hz, electronic driver with multipower settings, ultra low LED flickering rate (5% or less). Multipower version with 8 settings to meet all installation needs in one single product (selection between 950lm; 1200lm; 1450lm; 1650lm; 1850lm; 2300lm; 2700lm; 3150lm). Ceiling surface mounting. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only. Push-in terminals for quick installation. Lifespan up to 100,000h, L90B10. Complete with 1.2m suspension cable, and a ceiling rose. Nominal product dimensions: D.81mmx1410mm. 5 years warranty. Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal.


### Product Overview

<b>Product name</b>	PIXO PENDANT 3150LM 3CCT MB WB MULTIPOWER WHITE
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Ceiling surface mounting

## PIXO PENDANT 3150LM 3CCT MB WB MULTIPOWER WHITE 0004701

General application	Museums & Galleries, Retail
ETIM Class	EC001743
E-number FI	4279701
Fixture luminous flux (lm)	3150
Luminaire efficacy (lm/W)	117
Light colour	N/A
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	27
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288047010
Warranty	5 years
Dimming method	N/A

### Photometry

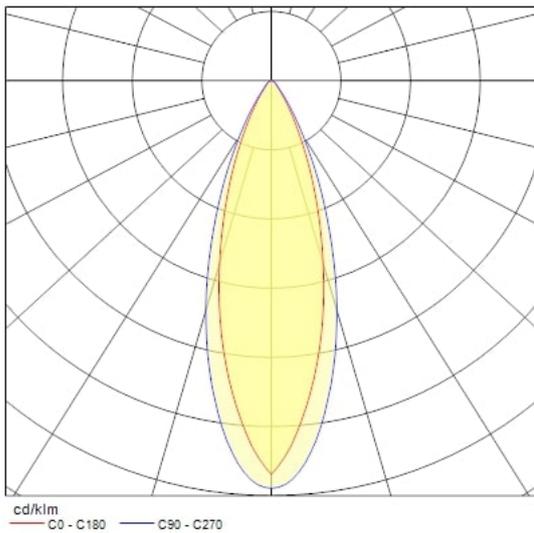

### Technical drawings

