


Walraven Bifix® G2 (M8/10) (BUP1000)

(B0504)

for insulated, steel and cast iron pipes

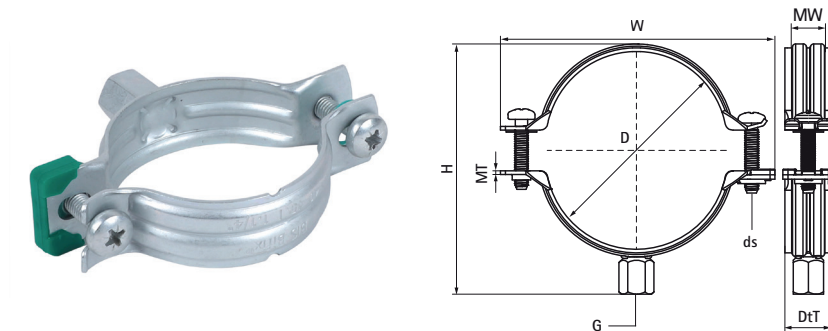

Features & benefits

- two-screw clamp
- with quick locking system
- perfect solution for pipe supports, also for outdoor installations
- material: steel
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	W x H x DtT	MW x MT	ds		F _{0,z}
Unit description	mm		"		mm x mm x mm	mm x mm			N
3008014	10 - 14	DN 8	1/4	M8/M10	52 x 35 x 22	20 x 125	M6	RAL-GZ 655/B CE ETA	1,200
3008019	15 - 19	DN 10	3/8	M8/M10	59 x 43 x 22	20 x 125	M6	RAL-GZ 655/B CE ETA	1,200
3008023	20 - 23	DN 15	1/2	M8/M10	63 x 46 x 22	20 x 125	M6	RAL-GZ 655/B CE ETA	1,200
3008028	25 - 28	DN 20	3/4	M8/M10	68 x 50 x 22	20 x 125	M6	RAL-GZ 655/B CE ETA	1,200
3008035	31 - 35	DN 25	1	M8/M10	74 x 56 x 22	20 x 125	M6	RAL-GZ 655/B CE ETA	1,200
3008039	36 - 39	-	-	M8/M10	80 x 62 x 22	20 x 125	M6	RAL-GZ 655/B CE ETA	1,200
3008045	40 - 45	DN 32	1 1/4	M8/M10	84 x 66 x 22	20 x 125	M6	RAL-GZ 655/B CE ETA	1,200
3008052	48 - 52	DN 40	1 1/2	M8/M10	91 x 73 x 22	20 x 125	M6	RAL-GZ 655/B CE ETA	1,200
3008058	54 - 58	-	-	M8/M10	97 x 79 x 22	20 x 125	M6	RAL-GZ 655/B CE ETA	1,200
3008064	60 - 64	DN 50	2	M8/M10	104 x 86 x 22	20 x 125	M6	RAL-GZ 655/B CE ETA	1,200
3008070	66 - 70	-	-	M8/M10	110 x 92 x 22	20 x 150	M6	RAL-GZ 655/B CE ETA	1,200
3008079	75 - 79	DN 65	2 1/2	M8/M10	118 x 100 x 22	20 x 15	M6	RAL-GZ 655/B CE ETA	1,300
3008083	80 - 83	-	-	M8/M10	125 x 107 x 22	20 x 15	M6	RAL-GZ 655/B CE ETA	1,300
3008091	88 - 91	DN 80	3	M8/M10	134 x 115 x 27	23 x 2	M6	RAL-GZ 655/B CE ETA	1,800
3008105	100 - 105	-	-	M8/M10	148 x 129 x 27	23 x 2	M6	RAL-GZ 655/B CE ETA	1,800
3008115	108 - 115	DN 100	4	M8/M10	155 x 137 x 27	23 x 2	M6	RAL-GZ 655/B CE ETA	1,800
3008130	125 - 130	-	-	M8/M10	172 x 154 x 27	23 x 2	M6	RAL-GZ 655/B CE ETA	1,800
3008140	133 - 140	DN 125	5	M8/M10	181 x 162 x 27	23 x 2	M6	RAL-GZ 655/B CE ETA	1,800
3008160	152 - 160	-	-	M8/M10	201 x 183 x 27	23 x 2	M6	RAL-GZ 655/B CE ETA	1,800
3008169	165 - 169	DN 150	6	M8/M10	217 x 195 x 28	25 x 25	M8	RAL-GZ 655/B CE ETA	3,600
3008180	176 - 180	-	-	M8/M10	229 x 208 x 28	25 x 25	M8	RAL-GZ 655/B CE ETA	3,600
3008200	192 - 200	-	-	M8/M10	248 x 227 x 28	25 x 25	M8	RAL-GZ 655/B CE ETA	3,600
3008210	205 - 210	-	-	M8/M10	261 x 239 x 28	25 x 25	M8	RAL-GZ 655/B CE ETA	3,600
3008225	219 - 225	DN 200	8	M8/M10	275 x 253 x 28	25 x 25	M8	RAL-GZ 655/B CE ETA	3,600