




Color: white

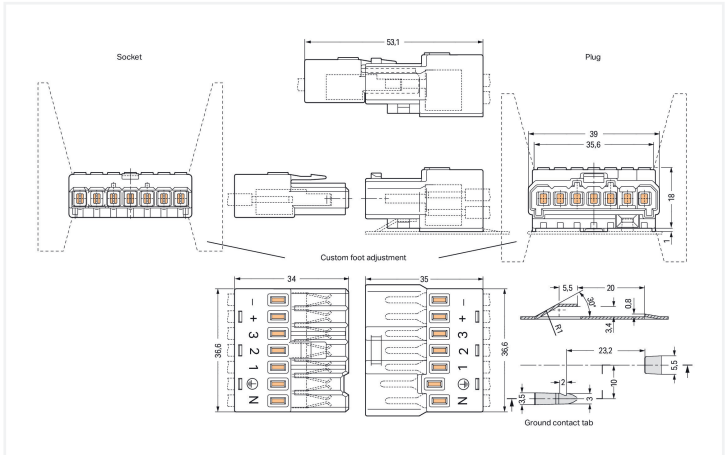

Dimensions in mm

Electrical data

Ratings per	IEC/EN 61984		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated surge voltage	-	4 kV	-
Rated current	-	16 A	-

Connection data

Connection points	7
Number of connection types	1
Number of levels	1

Connection 1	
Connection technology	PUSH WIRE®
Solid conductor	1.5 ... 2.5 mm²
Strip length	11 ... 12 mm / 0.43 ... 0.47 inches
Pole number	7

Physical data

Width	34 mm / 1.339 inches
Height	18 mm / 0.709 inches
Depth	39 mm / 1.535 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.181 MJ
Weight	13.9 g



Environmental requirements	
Temperature stability	105 °C

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4044918546492
Customs tariff number	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	2156138.01
CCA DEKRA Certification B.V.	IEC 61984	NL-47713
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 267-501	



Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2010.85 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 267-501	↓

CAE data	
EPLAN Data Portal 267-501	↓
ZUKEN Portal 267-501	↓