

## BEACON LED MUSE II 97CRI 3000K L3 TRAILING EDGE BLACK 2059742



### Features

• Integrated LED spotlight, black RAL 9005, unique soft-touch ring, adjustable beam angle from a 8° spot to a 55° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 8° spot to 55° flood, optics: aspheric glass lens, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1081lm, luminaire efficacy: 51lm/W, LOR: 100%, colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x135x176mm, weight: 0.95kg.


### Product Overview

|                            |                                                       |
|----------------------------|-------------------------------------------------------|
| Product name               | BEACON LED MUSE II 97CRI 3000K L3 TRAILING EDGE BLACK |
| Technology                 | LED                                                   |
| Cap/Base                   | N/A                                                   |
| Housing                    | Aluminium                                             |
| Mount                      | Track mounting                                        |
| E-number FI                | 4280890                                               |
| Fixture luminous flux (lm) | 553/1081                                              |
| Luminaire efficacy (lm/W)  | 52                                                    |
| LOR (%)                    | 100                                                   |
| Colour temperature (K)     | 3000                                                  |
| Light colour               | Warm White                                            |
| CRI (Ra)                   | 97                                                    |

## BEACON LED MUSE II 97CRI 3000K L3 TRAILING EDGE BLACK 2059742

|                                 |                      |
|---------------------------------|----------------------|
| Colour Variation Initial (SDCM) | 3                    |
| Photobiological Risk Group      | RG1                  |
| Total power consumption (W)     | 21                   |
| Electrical protection           | Class II             |
| Housing colour                  | RAL 9005 - Jet black |
| IP rating                       | IP20                 |
| IK rating                       | IK02                 |
| Product EAN number              | 5025768597420        |
| Warranty                        | 5 years              |

### Photometry

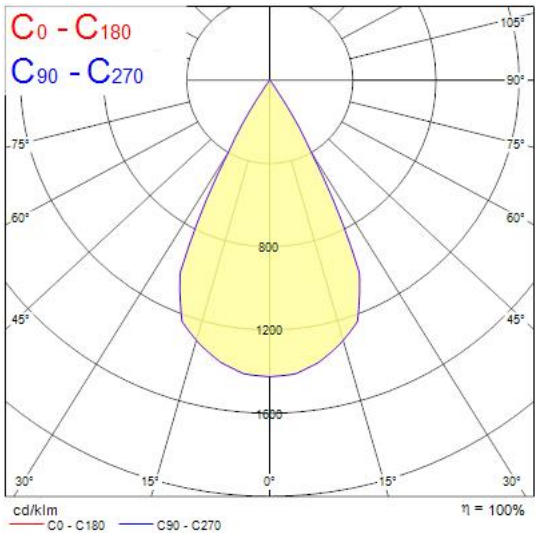

### Technical drawings

