


RANA Recessed 600


RANA LED R 600 LO 4K LOUV+PRI 1-10 W GEN2

0052406



Product features

- Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 595x595x60mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 570x130mm, 1-10V Dimmable, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 3000lm, 28W, 107lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.

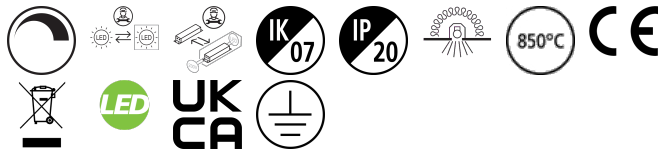

PRODUCT OVERVIEW

| | |
|-----------------------------------|---|
| Product name | RANA LED R 600 LO 4K LOUV+PRI 1-10 W GEN2 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling recessed mounting |
| General application | Education, Hospitality, Office, Retail |
| ETIM Class | EC002892 |
| E-number FI | 4273761 |
| Warranty | 5 years |
| Useful luminous flux (Fuse) | 3000 |
| Fixture luminous flux (lm) | 3000 |
| Luminous flux (lm) | 3000 |
| Luminaire efficacy (lm/W) | 107 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Glare control | < 19 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 28 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Dimming method | 1-10V (Analogue) |
| Minimum dimming level (%) | 10 |
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK07 |
| Product EAN number | 5410288524061 |

