


## Data Sheet | Item Number: 789-570


Latching relay module; Nominal input voltage: 230 VAC; 1 make contact; Limiting continuous current: 16 A; Red status indicator; Module width: 18 mm; 2,50 mm<sup>2</sup>; gray

<https://www.wago.com/789-570>

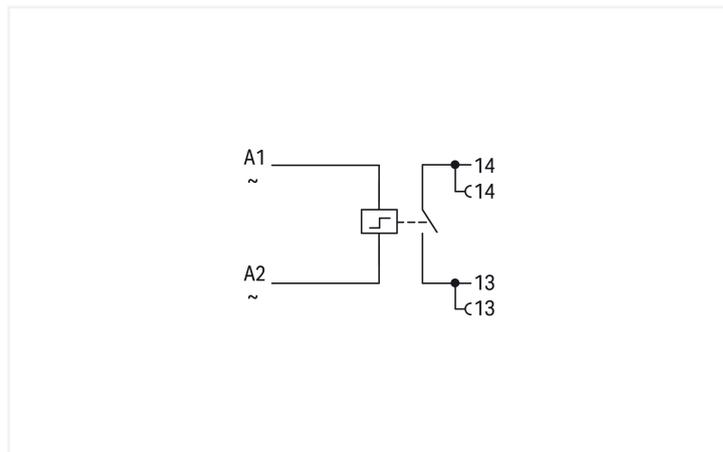

Color: ■ gray

Similar to illustration

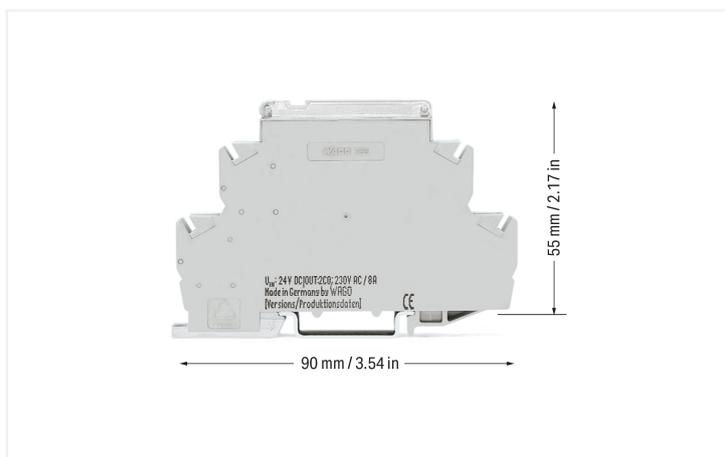

### Technical data

#### Control circuit

Nominal input voltage $U_N$	230 VAC
Input voltage range	-15 ... +10 %
Nominal input current at $U_N$	10 mA
Coil Control	Pulse mode
Minimum pulse length (control input)	40 ms
Minimum break time	180 ms

#### Load circuit

Number of make/switch-on contacts	1
Contact material (relay)	AgSnO <sub>2</sub>
Limiting continuous current	16 A
Inrush current (resistive) max.	(AC) 50 A / 0.02 s
Switching Voltage, Max.	250 VAC
Switching power (resistive) max.	AC 4000 VA
Recommended minimum load	10 V / 10 mA
Electrical life (NO; resistive load; 23 °C)	50 x 10 <sup>3</sup> switching operations
Mechanical life	100 x 10 <sup>3</sup> switching operations
Switching frequency with/without load (max.)	6 min <sup>-1</sup> / 240 min <sup>-1</sup>
Circuit protection	Circuit breaker: 16 A (max.); Tripping characteristic: B

### Signaling

Status indicator	Red LED
------------------	---------

### Safety and protection

Rated Voltage	250 V
Rated impulse withstand voltage	4 kV
Pollution degree	2
Dielectric strength (control/load circuit) (AC, 1 min)	4 kVrms
Protection type	IP20

### Connection Data

Connection technology	CAGE CLAMP®
Solid conductor	0.2 ... 2.5 mm <sup>2</sup> / 24 ... 14 AWG
Fine-stranded conductor	0.2 ... 2.5 mm <sup>2</sup> / 24 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

### Physical data

Width	17.5 mm / 0.689 inches
Height	90 mm / 3.543 inches
Depth from upper-edge of DIN-rail	55 mm / 2.165 inches

### Mechanical data

Housing design	DIN-rail-mount enclosure
Mounting type	DIN-35 rail

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray
Fire load	0.742 MJ
Weight	59.4 g

### Environmental requirements

Ambient temperature (operation at U <sub>N</sub> )	-25 ... +40 °C
Ambient temperature (storage)	-40 ... +85 °C
Processing temperature	-25 ... +50 °C

### Standards and Specifications

Standards/specifications	EN 60664-1
--------------------------	------------

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332790222
Customs tariff number	85364900990

Product Classification	
UNSPSC	39121529
eCl@ss 10.0	27-14-23-09
eCl@ss 9.0	27-14-23-09
ETIM 9.0	EC001437
ETIM 10.0	EC001437
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

### Approvals / Certificates

#### General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03084

### Downloads

#### Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 789-570	<a href="#">↓</a>

### Documentation

Bid Text			
789-570	19.02.2019	xml 4.85 KB	<a href="#">↓</a>
789-570	20.02.2019	docx 16.47 KB	<a href="#">↓</a>

Instruction Leaflet			
Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025	pdf 1246.19 KB	<a href="#">↓</a>

CAD/CAE-Data

CAD data

2D/3D Models 789-570



CAE data

EPLAN Data Portal  
789-570



WSCAD Universe  
789-570



ZUKEN Portal 789-570



1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule



[Item No.: 216-241](#)

Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white

[Item No.: 216-242](#)

Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

[Item No.: 216-243](#)

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

[Item No.: 216-244](#)

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

1.1.2 Jumper

1.1.2.1 Jumper



[Item No.: 789-112](#)

Jumper; 12-way; silver-colored

1.1.3 Marking

1.1.3.1 Marker



[Item No.: 2009-145](#)

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[Item No.: 248-502](#)

Mini-WSB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

[Item No.: 248-566](#)

Mini-WSB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white

[Item No.: 248-503](#)

Mini-WSB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 248-504](#)

Mini-WSB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white

[Item No.: 248-506](#)

Mini-WSB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white

[Item No.: 248-452](#)

Mini-WSB marking card; as card; MARKED; K (100x); not stretchable; Horizontal marking; snap-on type; white

[Item No.: 248-450](#)

Mini-WSB marking card; as card; MARKED; K1 - K10 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 248-451](#)

Mini-WSB marking card; as card; MARKED; K11 - K20 (10x); not stretchable; Horizontal marking; snap-on type; white

[Item No.: 248-455](#)

Mini-WSB marking card; as card; MARKED; U 100 (10x); not stretchable; Horizontal marking; snap-on type; white

[Item No.: 248-453](#)

Mini-WSB marking card; as card; MARKED; U1, ... U10 (10x); not stretchable; Horizontal marking; snap-on type; white

[Item No.: 248-454](#)

Mini-WSB marking card; as card; MARKED; U11 - U20 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 248-501](#)

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

### 1.1.3.2 Marking device



Item No.: [210-110](#)

Fiber-tip pen

### 1.1.4 Tool

#### 1.1.4.1 Operating tool




Item No.: [210-720](#)

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

## Installation Notes

### Conductor termination



Inserting a conductor.

### Commoning



Easy commoning via adjacent jumpers.

### Marking



Marking via Mini-WSB Quick Marking System.