

Concord

EXPOSPOT 90 DUO HE RA90 3000K NB WHITE 2070053



Features

- Integrated LED double gimbal accent downlight, duo head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 25°, optics: aluminium reflector and lens combination, colour temperature: 3000K warm white, total system power: 50W, total fixture output: 2x2536lm, 101lm/W, LOR: 100%, colour rendering: Ra 90 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 148x292mm, dimensions: 163x307x104mm, weight: 2.1kg.

Product Overview


| | |
|---------------------------------|--|
| Product name | EXPOSPOT 90 DUO HE RA90 3000K NB WHITE |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| Fixture rating | Enclosed |
| Fixture luminous flux (lm) | 2 x 2536 |
| Luminaire efficacy (lm/W) | 101 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 90 |
| Colour Variation Initial (SDCM) | 3 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 50 |
| Electrical protection | Class II |

Concord

EXPOSPOT 90 DUO HE RA90 3000K NB WHITE 2070053

| | |
|-----------------------|--------------------|
| Control gear type | Electronic ballast |
| Control gear mounting | Remote |
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768700530 |
| Warranty | 5 years |

Photometry

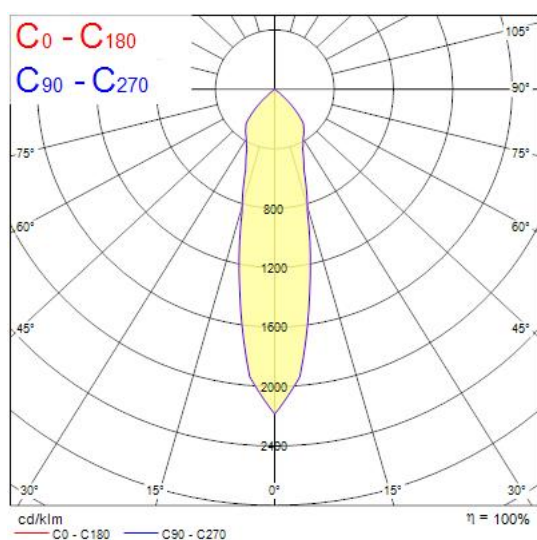

Technical drawings

