


Insaver HO Topper LED II 205

Insaver HO Topper LED II 205 RO 21W NW
3033943



Product features

- IP44 from the front round LED downlight with polycarbonate diffuser with a white bezel. Shallow recess depth (<65mm). Available in 12, 15, 21 & 25W in 150mm, 175mm, 205mm & 225mm cut out sizes. Perfect for up to 2x26W CFL replacement. Includes loop-in loop-out facility for quick installation.

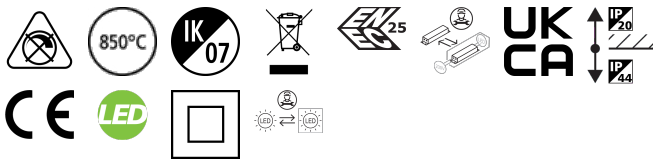

PRODUCT OVERVIEW


Product name	Insaver HO Topper LED II 205 RO 21W NW
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality
ETIM Class	EC001744
E-number SE	7465649
Warranty	5 years
Useful luminous flux (Fuse)	2150
Fixture luminous flux (lm)	2150
Luminaire efficacy (lm/W)	102
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	74
Glare control	< 24
Photobiological Risk Group	RG0
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Product EAN number	8711971339434

Insaver HO Topper LED II 205 *Insaver HO Topper LED II 205 RO 21W NW* 3033943

PHOTOMETRY

0.5	0.79 0.79	E(0°) 4885 E(C90) 28.2° 1119 E(C0) 28.1° 1114
1.0	1.87 1.87	E(0°) 1141 E(C90) 28.2° 279 E(C0) 28.1° 273
1.5	2.36 2.35	E(0°) 807 E(C90) 28.2° 154 E(C0) 28.1° 151
2.0	3.15 3.14	E(0°) 586 E(C90) 28.2° 110 E(C0) 28.1° 107
2.5	3.93 3.92	E(0°) 453 E(C90) 28.2° 85 E(C0) 28.1° 82
3.0	4.72 4.70	E(0°) 357 E(C90) 28.2° 61 E(C0) 28.1° 58

Distance [m] Core diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 76.5°)
 — C90 - C270 (Half beam angle: 76.4°)



TECHNICAL DRAWINGS

