


## Pushbutton lightable with nameplate



### Use

Pushbutton for loads up to 3A

### Range

Designation	Item
Pushbutton lightable with nameplate 1P (NO) 3A- 250Va.c. with dry contact and backlighting with integrated white LED (the LED is not interchangeable) 2 modules	Y4040

### Connection


Terminal type: screw clamp  
Terminal capacity: 4 mm max  
Stripping length: 9mm  
Terminals 1-2: dry contact (NO)  
Terminals L-N: Live and Neutral contact  
Compatible with flexible or rigid cables



### Technical characteristics

- **Protection index:**  
(considering a complete installation, including cover plate)
  - Penetration by solid bodies/liquid: IP40
  - Impact test: IK04
- **Material characteristics:**
  - Case: PC (polycarbonate)
  - Key cover : PC
  - Halogen Free
  - UV resistant
  - Self-extinguishing:  
850°C/30s for insulating parts holding live parts in place.  
650°C/30s for other parts made of insulating material.
- **Electrical characteristics:**
  - Voltage: 250 V a.c.
  - Current: 3A
  - Integrated LED: 30Va.c. 0.5W
- **Climatic characteristics:**
  - Storage temperature: -10° C a +70° C
  - Use temperature: -5° C a +35° C

### Overall dimensions (mm)

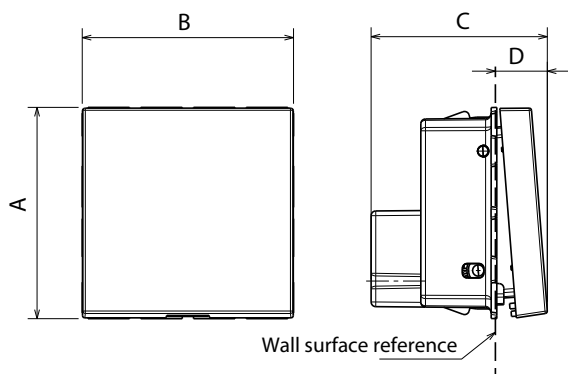

A	B	C	D
45.1	45	37.6	11.9

### Cleaning

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

**Caution: Always test before using special cleaning products.**

### Standards and approvals

Compliance with standards IEC/EN/CEI 60669-1.

Refer to e.catalogue.