



Data Sheet | Item Number: 859-397

Relay module; Nominal input voltage: 48 VDC; 1 changeover contact; Railway; Red status indicator; Module width: 6 mm




<https://www.wago.com/859-397>

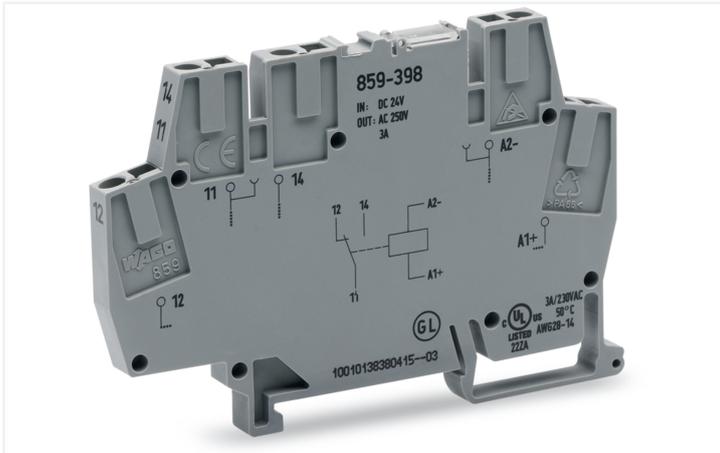

Similar to illustration

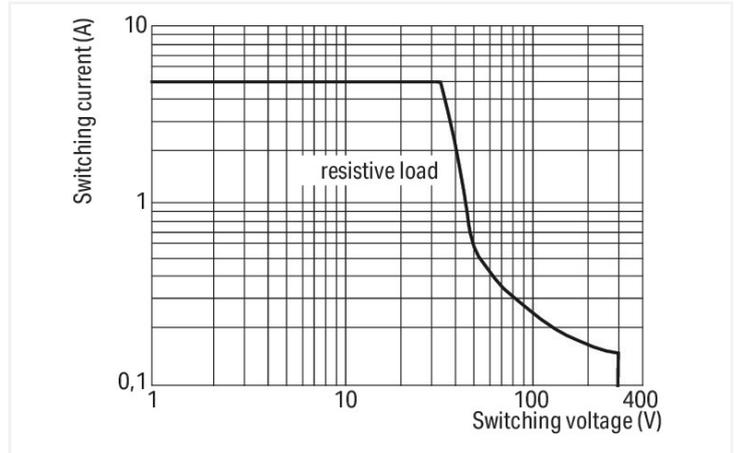

DC load limit curve

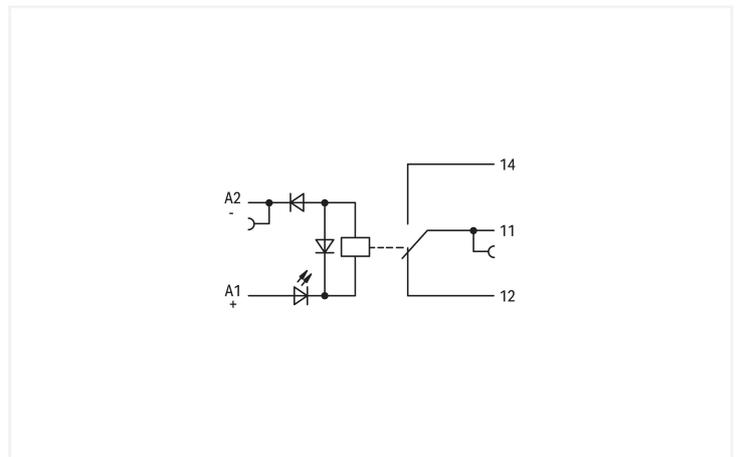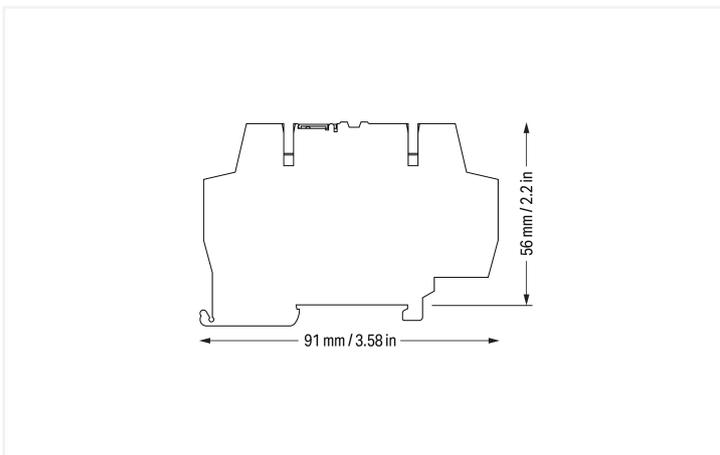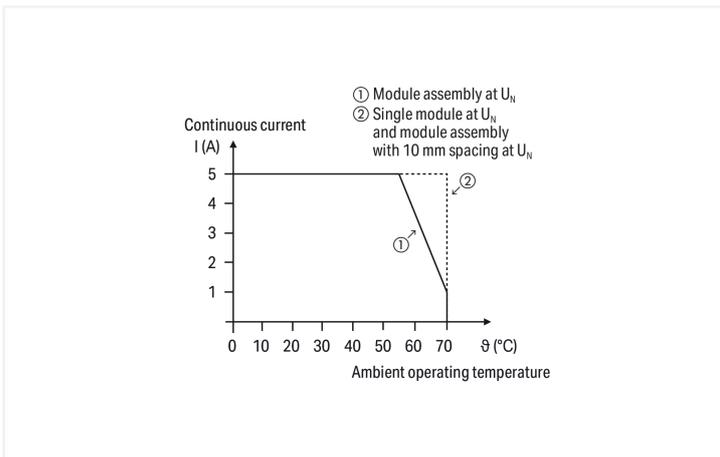

Notes

| | |
|------|---|
| Note | To protect the relay coils and contacts, inductive loads must be dampened with an effective protection circuit. |
|------|---|

Technical data

Control circuit

| | |
|--------------------------------|--------|
| Nominal input voltage U_N | 48 VDC |
| Input voltage range | ±40 % |
| Nominal input current at U_N | 8 mA |

Load circuit

| | |
|--|---|
| Number of changeover/switchover contacts | 1 |
| Contact material (relay) | AgSnO ₂ |
| Limiting continuous current | 5 A |
| Switching Voltage, Max. | 250 VAC |
| Switching power (resistive) max. | AC 1250 VA; DC (see load limit curve) |
| Switching capacity | AC-15: 3 A / 250 VAC; DC-13: 2 A / 24 VDC |
| Recommended minimum load | 10 V / 10 mA; 24 V / 1 mA |
| Pull-in time (typ.) | 15 ms |
| Drop-out time (typ.) | 25 ms |
| Bounce time (typ.) | 3.5 ms |
| Electrical life (NO; resistive load; 23 °C) | 50 x 10 ³ switching operations |
| Mechanical life | 5 x 10 ⁶ switching operations |
| Switching frequency with/without load (max.) | 6 min ⁻¹ / 180 min ⁻¹ |

Signaling

| | |
|------------------|---------|
| Status indicator | Red LED |
|------------------|---------|

Safety and protection

| | |
|--|--|
| Rated Voltage | 300 V |
| Rated impulse withstand voltage | 4 kV |
| Overtoltage category | III |
| Pollution degree | 2 |
| Dielectric strength (control/load circuit) (AC, 1 min) | 4 kVrms |
| Dielectric strength (open contact) (AC, 1 min) | 1 kVrms |
| Insulation type (control/load circuit) | Reinforced insulation (safe isolation) |
| Insulation type (adjacent devices) | Reinforced insulation (safe isolation) |
| Protection type | IP20; in connected state or when using 859-525 end plate |

Connection Data

| | |
|---|--|
| Connection technology | CAGE CLAMP® |
| Solid conductor | 0.08 ... 2.5 mm ² / 28 ... 14 AWG |
| Fine-stranded conductor | 0.08 ... 2.5 mm ² / 28 ... 14 AWG |
| Fine-stranded conductor; with insulated ferrule | 0.08 ... 1.5 mm ² / 28 ... 16 AWG |
| Strip length | 5 ... 6 mm / 0.2 ... 0.24 inches |

Physical data

| | |
|-----------------------------------|----------------------|
| Width | 6 mm / 0.236 inches |
| Height | 91 mm / 3.583 inches |
| Depth from upper-edge of DIN-rail | 56 mm / 2.205 inches |

Mechanical data

| | |
|-------------------|---------------------------------------|
| Mounting type | DIN-35 rail |
| Mounting position | horizontal (standing/lying); vertical |

Material data

| | |
|------------------------------------|--|
| Note (material data) | Information on material specifications can be found here |
| Insulation material (main housing) | Polyamide (PA66) |
| Material group | I |
| Flammability class per UL94 | V0 |
| Fire load | 0.313 MJ |
| Weight | 23.3 g |

Environmental requirements

| | |
|---|--|
| Ambient temperature (operation at U_N) | -40 ... +70 °C |
| Ambient temperature (storage) | -40 ... +70 °C |
| Processing temperature | -25 ... +50 °C |
| Temperature range of connection cable | $\geq (T_{\text{ambient}} + 20 \text{ K})$ |
| Relative humidity | 5 ... 95 % (no condensation permissible) |
| Operating altitude (max.) | 2000 m |

Standards and Specifications

| | |
|--------------------------|---|
| Standards/specifications | EN 61010-2-201 EN 61810-1 EN 61373 EN 50121-3-2 DNV |
|--------------------------|---|

Commercial data

| | |
|-----------------------|--------------------------|
| Product Group | 6 (INTERFACE ELECTRONIC) |
| PU (SPU) | 10 pcs |
| Packaging type | Box |
| Country of origin | DE |
| GTIN | 4055143604468 |
| Customs tariff number | 85364900990 |

Product Classification

| | |
|-------------|----------------------|
| UNSPSC | 39122334 |
| eCl@ss 10.0 | 27-37-16-01 |
| eCl@ss 9.0 | 27-37-16-01 |
| ETIM 9.0 | EC001437 |
| ETIM 10.0 | EC001437 |
| ECCN | NO US CLASSIFICATION |

Environmental Product Compliance

| | |
|---|--|
| CAS-No. | 7439-92-1 79-94-7 |
| REACH Candidate List Substance | 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol Lead |
| RoHS Compliance Status | Compliant,With Exemption |
| RoHS Exemption | 7(a) 7(c)-I |
| SCIP notification number (Austria) | 41943199-025a-489d-8b9a-531bf841f223 |
| SCIP notification number (Belgium) | 7965d6b5-7a48-49f8-b116-2a54bcbfff9b |
| SCIP notification number (Bulgaria) | b3d2c2f2-c897-4608-b139-b56d742a32c1 |
| SCIP notification number (Czech Republic) | 5292599a-7b0e-424d-a5f3-7caafc35e33f |
| SCIP notification number (Denmark) | 9fcf8dd6-a7be-49d2-8214-f55ba1cfec1a |
| SCIP notification number (Finland) | fd91d615-55cf-47df-83fb-3e709ca1c3c2 |
| SCIP notification number (France) | 99ba37e7-3d9e-4ea9-8f67-0443eff3ad76 |
| SCIP notification number (Germany) | ff17c057-6d12-4e36-ba06-a915200f6f08 |
| SCIP notification number (Hungary) | 514207e3-c253-4a2c-bca9-cf4b0f312437 |
| SCIP notification number (Italy) | e4d86041-5e07-477d-90a1-6361f416baf4 |
| SCIP notification number (Netherlands) | c8bc4bfb-293d-4753-993e-6135be8383c1 |
| SCIP notification number (Poland) | 0719f484-78e1-4549-a34f-4f54d0f83ca6 |
| SCIP notification number (Romania) | 08e28d55-559b-431c-be63-41089606ebc4 |
| SCIP notification number (Sweden) | e60023e7-1765-4c55-8e22-e833f36d16d7 |

Approvals / Certificates

General approvals



| Approval | Standard | Certificate Name |
|----------------------------|----------------|------------------|
| EAC GZO Almaty Standart | TP TC 004/2011 | EAC CoC 03078 |
| EAC GZO Almaty Standart | TP TC 020/2011 | EAC CoC 03081 |

Declarations of conformity and manufacturer's declarations

| Approval | Standard | Certificate Name |
|---|----------|------------------|
| EU-Declaration of Confor- mity WAGO GmbH & Co. KG | - | - |
| MFD for Railway WAGO GmbH & Co. KG | - | - |

Approvals for marine applications



| Approval | Standard | Certificate Name |
|-------------------------------|----------------------|-------------------|
| DNV DNV Germany GmbH | DNV-CG-0339,Aug.2021 | TAA00001D1 |
| PRS Polski Rejestr Statków | - | TE/1098/880590/23 |

Downloads

Environmental Product Compliance

| Compliance Search | | | |
|--|--|--|-------------------|
| Environmental Product Compliance 859-397 | | | ↓ |

Documentation

| Bid Text | | | |
|----------|------------|------------------|-------------------|
| 859-397 | 19.02.2019 | xml 4.51 KB | ↓ |
| 859-397 | 20.02.2019 | docx 16.88 KB | ↓ |

| Instruction Leaflet | | | |
|-------------------------------------|-----------------------|-------------------|-------------------|
| Relay modules, Opto-coupler modules | V 2.0.0 19.01.2022 | pdf 2066.27 KB | ↓ |

CAD/CAE-Data

| CAD data | |
|----------------------|-------------------|
| 2D/3D Models 859-397 | ↓ |

| CAE data | |
|---------------------------|-------------------|
| EPLAN Data Portal 859-397 | ↓ |
| WSCAD Universe 859-397 | ↓ |
| ZUKEN Portal 859-397 | ↓ |

1 Compatible Products

1.1 Optional Accessories

1.1.1 End plate

1.1.1.1 End plate



[Item No.: 859-525](#)
End and intermediate plate; 1 mm thick; gray

1.1.1.2 Intermediate plate



[Item No.: 859-525](#)
End and intermediate plate; 1 mm thick; gray

1.1.2 Ferrule

1.1.2.1 Ferrule



Item No.: 216-321
 Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow



Item No.: 216-322
 Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise



Item No.: 216-221
 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white



Item No.: 216-222
 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray



Item No.: 216-223
 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red



Item No.: 216-224
 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black

1.1.3 Jumper

1.1.3.1 Jumper



Item No.: 859-410/000-006
 Jumper; for jumper slot; 10-way; insulated; blue



Item No.: 859-410
 Jumper; for jumper slot; 10-way; insulated; light gray



Item No.: 859-410/000-005
 Jumper; for jumper slot; 10-way; insulated; red



Item No.: 859-410/000-029
 Jumper; for jumper slot; 10-way; insulated; yellow



Item No.: 859-402/000-006
 Jumper; for jumper slot; 2-way; insulated; blue



Item No.: 859-402
 Jumper; for jumper slot; 2-way; insulated; light gray



Item No.: 859-402/000-005
 Jumper; for jumper slot; 2-way; insulated; red



Item No.: 859-402/000-029
 Jumper; for jumper slot; 2-way; insulated; yellow



Item No.: 859-403/000-006
 Jumper; for jumper slot; 3-way; insulated; blue



Item No.: 859-403
 Jumper; for jumper slot; 3-way; insulated; light gray



Item No.: 859-403/000-005
 Jumper; for jumper slot; 3-way; insulated; red



Item No.: 859-403/000-029
 Jumper; for jumper slot; 3-way; insulated; yellow



Item No.: 859-404/000-006
 Jumper; for jumper slot; 4-way; insulated; blue



Item No.: 859-404
 Jumper; for jumper slot; 4-way; insulated; light gray



Item No.: 859-404/000-005
 Jumper; for jumper slot; 4-way; insulated; red



Item No.: 859-404/000-029
 Jumper; for jumper slot; 4-way; insulated; yellow



Item No.: 859-405/000-006
 Jumper; for jumper slot; 5-way; insulated; blue



Item No.: 859-405
 Jumper; for jumper slot; 5-way; insulated; light gray



Item No.: 859-405/000-005
 Jumper; for jumper slot; 5-way; insulated; red



Item No.: 859-405/000-029
 Jumper; for jumper slot; 5-way; insulated; yellow



Item No.: 859-406/000-006
 Jumper; for jumper slot; 6-way; insulated; blue



Item No.: 859-406
 Jumper; for jumper slot; 6-way; insulated; light gray



Item No.: 859-406/000-005
 Jumper; for jumper slot; 6-way; insulated; red



Item No.: 859-406/000-029
 Jumper; for jumper slot; 6-way; insulated; yellow



Item No.: 859-407/000-006
 Jumper; for jumper slot; 7-way; insulated; blue



Item No.: 859-407
 Jumper; for jumper slot; 7-way; insulated; light gray



Item No.: 859-407/000-005
 Jumper; for jumper slot; 7-way; insulated; red



Item No.: 859-407/000-029
 Jumper; for jumper slot; 7-way; insulated; yellow



Item No.: 859-408/000-006
 Jumper; for jumper slot; 8-way; insulated; blue



Item No.: 859-408
 Jumper; for jumper slot; 8-way; insulated; light gray



Item No.: 859-408/000-005
 Jumper; for jumper slot; 8-way; insulated; red



Item No.: 859-408/000-029
 Jumper; for jumper slot; 8-way; insulated; yellow



Item No.: 859-409/000-006
 Jumper; for jumper slot; 9-way; insulated; blue



Item No.: 859-409
 Jumper; for jumper slot; 9-way; insulated; light gray



Item No.: 859-409/000-005
 Jumper; for jumper slot; 9-way; insulated; red



Item No.: 859-409/000-029
 Jumper; for jumper slot; 9-way; insulated; yellow

1.1.4 Marking

1.1.4.1 Marker



Item No.: 2009-145

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 248-502

Mini-WSB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 248-503

Mini-WSB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 248-504

Mini-WSB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 248-506

Mini-WSB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 248-501

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

1.1.4.2 Marking device



Item No.: 210-110

Fiber-tip pen

1.1.5 Test and measurement

1.1.5.1 Testing accessories



Item No.: 859-500

WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 10 mm uninsulated; Test lead for soldering up to 0,5mm²

1.1.6 Tool

1.1.6.1 Operating tool




Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured


Installation Notes

Conductor termination



Conductor termination

Commoning



Easy commoning using adjacent jumpers

Marking



Marking via Mini-WSB Quick Marking System