


Lighting



Use


Rechargeable lamp with automatic ignition device. It turns on automatically in case of power failure.
White light LEDs with high luminous efficiency.

Range

Designation	Item
led lamp 1 module	<input type="checkbox"/> Y4381

Colors: Opal White

Overall dimensions (mm)

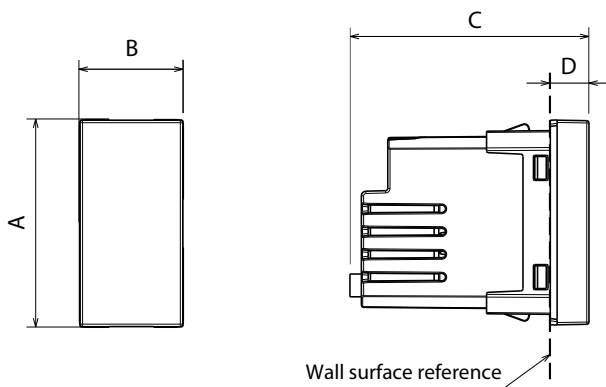

A	B	C	D
45	22.5	52.5	8.6

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 1.5mm² max
Stripping length: 8 mm
Compatible with flexible or rigid cables

Technical characteristics

- **Protection index:**
(considering a complete installation, including cover plate)
 - Penetration by solid bodies/liquid: IP40
 - Impact test: IK04
- **Material characteristics:**
 - Case: PC (polycarbonate)
 - Light diffuser: PC
 - Halogen Free
 - UV resistant
 - Self-extinguishing:
850°C/30s for insulating parts holding live parts in place.
650°C/30s for other parts made of insulating material.
- **Electrical characteristics:**
 - Voltage: 230 V a.c.
 - Frequency: 50/60 Hz
 - Full charge time: 48 h
 - Autonomy: 2h
 - Stand-by consumption : 0.1 W
 - Light source: 1 white led
 - Luminous flux: 10 lm
- **Climatic characteristics:**
 - Storage temperature: -20° C a +40° C
 - Use temperature: -0° C a +40° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards:
EN60598-1 / EN60598-2-2 / EN60825-1 EN61547 / EN61000-3-2
EN61000-3-3 / EN55015

Refer to e.catalogue.