



## Data Sheet | Item Number: 286-376

Relay module; Nominal input voltage: 24 VDC; 1 make contact; Limiting continuous current: 5 A; for switching higher DC loads; Red status indicator; Module width: 15 mm; gray

<https://www.wago.com/286-376>

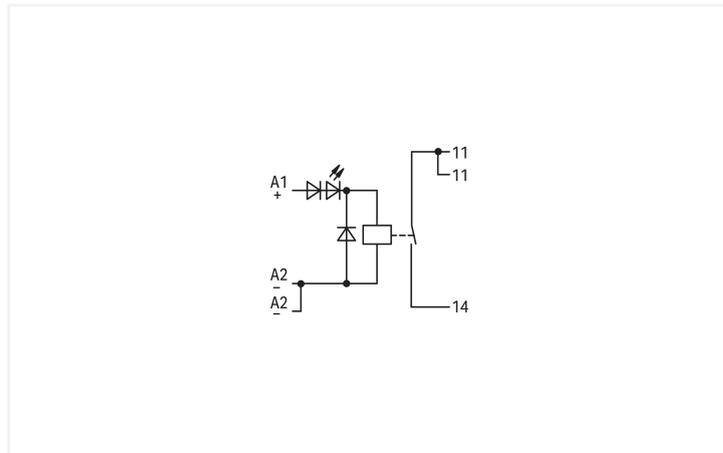

Color: ■ gray

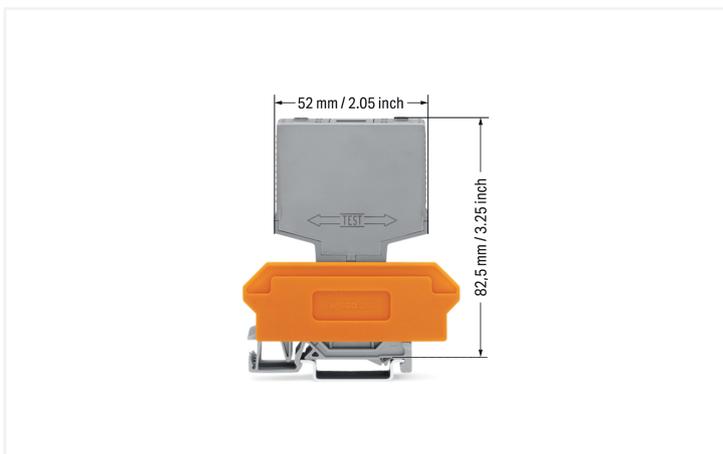

### Technical data

#### Control circuit

Nominal input voltage $U_N$	24 VDC
Input voltage range	$\pm 10\%$
Nominal input current at $U_N$	20 mA

#### Load circuit

Number of make/switch-on contacts	1
Contact material (relay)	AgNi 0.15
Limiting continuous current	5 A
Inrush current (resistive) max.	(AC) 14 A / 4 s
Switching Voltage, Max.	250 VAC
Recommended minimum load	12 V / 10 mA
Pull-in time (typ.)	9 ms
Drop-out time (typ.)	3 ms
Bounce time (typ.)	5 ms
Electrical life (NO; resistive load; 23 °C)	300 x 10 <sup>3</sup> switching operations
Mechanical life	20 x 10 <sup>6</sup> switching operations

### Safety and protection

Rated Voltage	250 V
Rated impulse withstand voltage	4 kV
Pollution degree	2
Dielectric strength (control/load circuit) (AC, 1 min)	4 kVrms
Dielectric strength (open contact) (AC, 1 min)	2 kVrms
Protection type	IP20

### Physical data

Width	15 mm / 0.591 inches
Height	52 mm / 2.047 inches
Depth from upper-edge of DIN-rail	82.5 mm / 3.248 inches
Note (dimensions)	Depth including carrier terminal block

### Mechanical data

Mounting type	Pluggable module for receptacle terminal blocks
---------------	---

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray
Fire load	0.327 MJ
Weight	35 g

### Environmental requirements

Ambient temperature (operation at $U_N$ )	-25 ... +40 °C
Ambient temperature (storage)	-25 ... +70 °C
Processing temperature	-25 ... +50 °C
Relative humidity	5 ... 75 % (no condensation permissible)
Operating altitude (max.)	2000 m

### Standards and Specifications

Standards/specifications	EN 60664-1
--------------------------	------------

### Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	15 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454717933
Customs tariff number	85364900990

Product Classification	
UNSPSC	39122334
eCl@ss 10.0	27-37-16-01
eCl@ss 9.0	27-37-16-01
ETIM 9.0	EC001437
ETIM 10.0	EC001437
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Austria)	4e1b4055-087c-4a3e-a9b1-afd880260309
SCIP notification number (Belgium)	33ce7bf4-2953-415e-9186-5ca4420f92ec
SCIP notification number (Bulgaria)	8f319067-9720-478a-9c06-c50b07b70984
SCIP notification number (Czech Republic)	3ef3497e-cbd1-4e3a-bed8-fe75a0248b1a
SCIP notification number (Denmark)	3011ca5f-1460-4e28-bc07-35f1070f6701
SCIP notification number (Finland)	1f613a0d-fc6e-4a24-9a74-9bedc14f4723
SCIP notification number (France)	04efb98f-51fa-4dfe-910b-fea11c70ec5a
SCIP notification number (Germany)	95fbef6a-c12e-4c2e-8a12-66539cb00174
SCIP notification number (Hungary)	aae64928-f965-4f7d-8d63-72bb39003c29
SCIP notification number (Italy)	0958961e-145f-44e1-b468-f95d2b516c84
SCIP notification number (Netherlands)	23aa201b-3a44-4b32-a0ee-ff7033d3a087
SCIP notification number (Poland)	272cdb20-48f0-45ab-9316-f2735fd45288
SCIP notification number (Romania)	593db507-7110-4ab2-93a0-ae07b116c5e2
SCIP notification number (Sweden)	5695db05-064f-440b-a913-517b1a1ca8a2

### Approvals / Certificates

#### General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078

### Downloads

#### Environmental Product Compliance

Compliance Search
Environmental Product Compliance 286-376 

## Documentation

Bid Text			
286-376	19.02.2019	xml 3.75 KB	<a href="#">↓</a>
286-376	26.03.2015	doc 28.00 KB	<a href="#">↓</a>

Instruction Leaflet			
Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025	pdf 1246.19 KB	<a href="#">↓</a>

## CAD/CAE-Data

CAE data	
WSCAD Universe 286-376	<a href="#">↓</a>

## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 Marking

##### 1.1.1.1 Marker



**Item No.: 209-701**

WSB marking card; as card; not stretchable; plain; snap-on type; white

#### 1.1.2 Terminal blocks

##### 1.1.2.1 Terminal block for pluggable modules



**Item No.: 280-619**

Terminal block for pluggable modules; 6-pole; with 2-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm<sup>2</sup>; CAGE CLAMP®; 2,50 mm<sup>2</sup>; gray



**Item No.: 280-763**

Terminal block for pluggable modules; 6-pole; with 4-conductor terminal blocks; with marker carrier; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm<sup>2</sup>; CAGE CLAMP®; 2,50 mm<sup>2</sup>; gray



**Item No.: 280-609**

Terminal block for pluggable modules; 6-pole; with 4-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm<sup>2</sup>; CAGE CLAMP®; 2,50 mm<sup>2</sup>; gray

## Installation Notes

### Installation



Coding ensures correct polarity.



Pluggable electronic modules on 2- or 4-conductor carrier terminal blocks

## Marking



Marking via WMB Multi Marking System.

## Testing



Function testing via touch-proof test slots