


Walraven RapidStrut® 'Heavy Duty' Beam Clamp

(H3640)

to connect Strut rails to steel beams

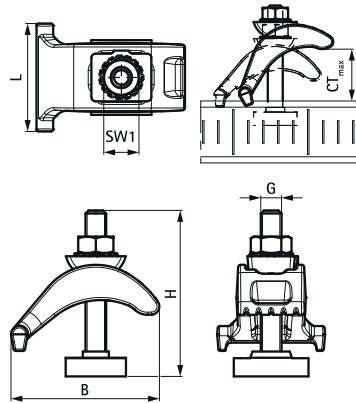

Features & benefits

- solid cast iron beam clamp for suspension of heavy loads onto beams without welding or drilling
- up to flange thickness 35 mm
- for fixing of all Walraven RapidStrut® to a steel beam
- material: steel
- hot dip galvanized
- Faz: max. allowed load acc. RAL GZ-655 / D-3.3.



Product Number	For Rail Type	Clamping Range	Thread Size	Thread Length	Total Width x Total Height x Total Length	Width	Material Thickness	Torque Moment For Installation	Maximum Allowed Load Faz
Reference letter		CR	TS	TL	W x H x L	w	MT	T _{inst.}	F _{0,z}
Unit description		mm		mm	mm x mm x mm	mm	mm	Nm	N
6072002	41x21, 41x41, 41x51, 41x62, 41x82	1 - 35	M10	63	52 x 80 x 72	35	9	30	7,800