


SylMirror Slim/Flute
SYLMIRROR LED SLIM IP44 NW
0043213

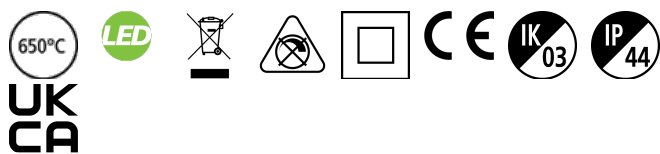

PRODUCT OVERVIEW

Product name	SYLMIRROR LED SLIM IP44 NW
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted
Fixture rating	Enclosed
E-number FI	4170555
E-number SE	7505161
Warranty	2 years
Fixture luminous flux (lm)	560
Luminaire efficacy (lm/W)	70
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Total power consumption (W)	8
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	Chrome
IP rating	IP44
IK rating	IK03
Product EAN number	5410288432137

DATA TABLE

General data	
Product name	SYLMIRROR LED SLIM IP44 NW
Technology	LED
Cap/Base	N/A
Housing	Aluminium

SylMirror Slim/Flute

SYLMIRROR LED SLIM IP44 NW
0043213

Mount	Wall surface mounted
Fixture rating	Enclosed
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature T _q (°C)	25
E-number FI	4170555
E-number SE	7505161
Warranty	2 years

Optical data

Fixture luminous flux (lm)	560
Luminaire efficacy (lm/W)	70
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	8
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.5
Electrical protection	Class II
Control gear type	LED driver constant current
Drive current (mA)	60
Inrush Current (A)	2
Inrush Duration (µs)	50
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	100
Connectable conductor cross section - Max (mm ²)	1.5

Lifetime data

Lifespan L70 B50	25000
------------------	-------

Physical data

Housing colour	Chrome
IP rating	IP44
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	400
Nominal Product Width (mm)	120
Weight (kg)	0.206

SylMirror Slim/Flute
SYLMIRROR LED SLIM IP44 NW
0043213


Packaging

Single packaging type	Carton
Product EAN number	5410288432137
Packaging single width (cm)	13.2
Packaging single depth (cm)	5.5
DUN14 (outer)	15410288432134
Packaging outer length / height (cm)	43.0

Safety data

Optimal operating condition (°C)	-10-45
----------------------------------	--------

PHOTOMETRY

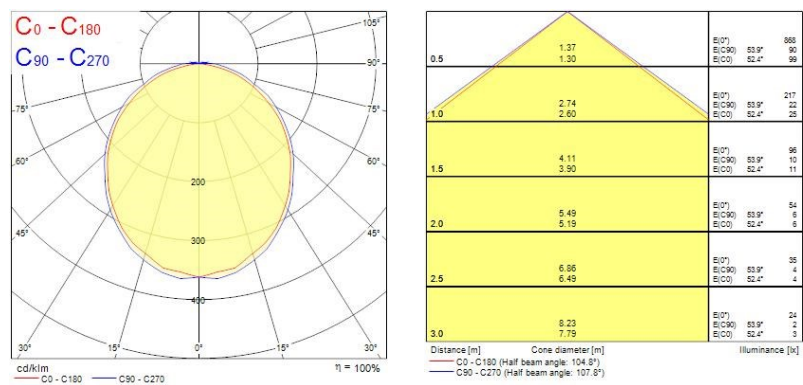

TECHNICAL DRAWINGS

