

Concord

BEACON LED MUSE II 97CRI 3000K L3 ON-BOARD DIM WHITE 2059745



Features

- Integrated LED spotlight, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 8° spot to a 55° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 8° spot to 55° flood, optics: aspheric glass lens, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1081lm, luminaire efficacy: 51lm/W, LOR: 100%, colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, dimmable via on-board potentiometer, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x135x176mm, weight: 0.95kg.

Product Overview


| | |
|----------------------------|--|
| Product name | BEACON LED MUSE II 97CRI 3000K L3 ON-BOARD DIM WHITE |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Track mounting |
| E-number FI | 4280893 |
| Fixture luminous flux (lm) | 553/1081 |
| Luminaire efficacy (lm/W) | 52 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 97 |

Concord

BEACON LED MUSE II 97CRI 3000K L3 ON-BOARD DIM WHITE 2059745

| | |
|---------------------------------|----------------------------------|
| Colour Variation Initial (SDCM) | 3 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 21 |
| Electrical protection | Class II |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768597451 |
| Warranty | 5 years |

Photometry

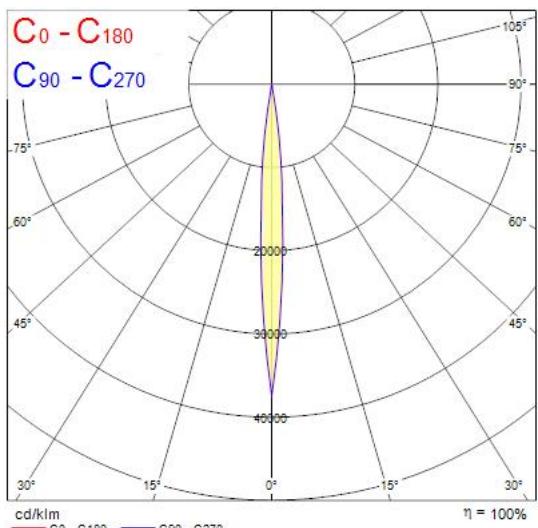

Technical drawings

