

SYLMIRROR LED SLIM IP44 NW
0043213



Features

- LED mirror/cabinet light with 8W total power consumption, 560 lumen, 110° beam angle, IP44, IK03, CRI 80, 4000K colour temperature, 400 mm length, 2 year warranty. Slim shape.


Product Overview

Product name	SYLMIRROR LED SLIM IP44 NW
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted
Fixture rating	Enclosed
E-number FI	4170555
E-number SE	7505161
Fixture luminous flux (lm)	560
Luminaire efficacy (lm/W)	70
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Total power consumption (W)	8
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	Chrome
IP rating	IP44


SYLMIRROR LED SLIM IP44 NW
0043213

IK rating	IK03
Product EAN number	5410288432137
Warranty	2 years

Photometry

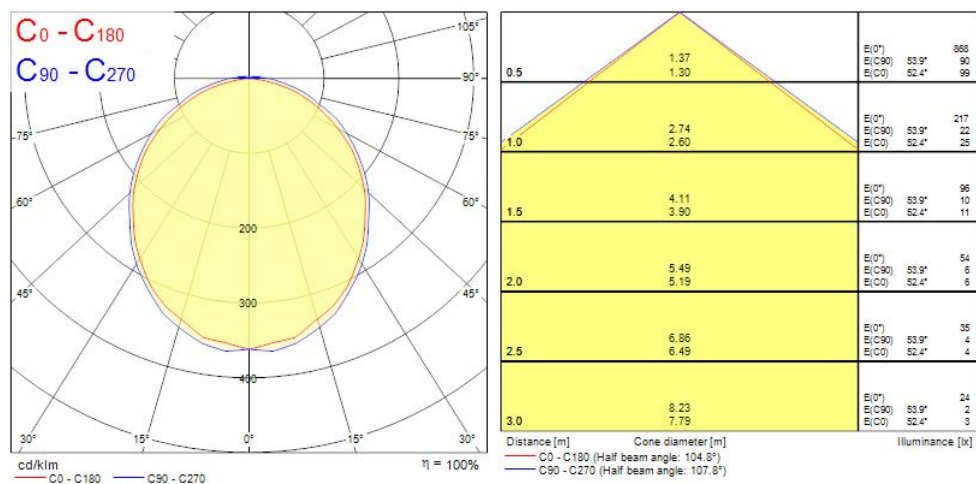

Technical drawings

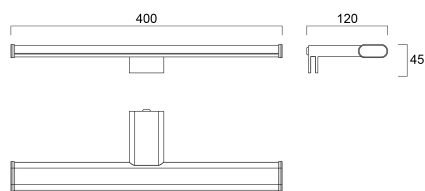

Data table

GENERAL DATA

Product name	SYLMIRROR LED SLIM IP44 NW
Technology	LED
Cap/Base	N/A

SYLMIRROR LED SLIM IP44 NW 0043213

Housing	Aluminium
Mount	Wall surface mounted
Fixture rating	Enclosed
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
E-number FI	4170555
E-number SE	7505161
Warranty	2 years

OPTICAL DATA

Fixture luminous flux (lm)	560
Luminaire efficacy (lm/W)	70
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	8
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.5
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	60
Inrush Current (A)	2
Inrush Duration (µs)	50
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

SYLMIRROR LED SLIM IP44 NW 0043213

Max. products per 10A C Breaker	100
---------------------------------	-----

Connectable conductor cross section - Max (mm ²)	1.5
---	-----

LIFETIME DATA

Lifespan L70 B50	25000
------------------	-------

PHYSICAL DATA

Housing colour	Chrome
----------------	--------

IP rating	IP44
-----------	------

IK rating	IK03
-----------	------

Diffuser finish	Opal
-----------------	------

Diffuser material	PC Polycarbonate
-------------------	------------------

Nominal Product Length (mm)	400
-----------------------------	-----

Nominal Product Width (mm)	120
----------------------------	-----

Weight (kg)	0.206
-------------	-------

PACKAGING

Single packaging type	Carton
-----------------------	--------

Product EAN number	5410288432137
--------------------	---------------

Packaging single width (cm)	13.2
-----------------------------	------

Packaging single depth (cm)	5.5
-----------------------------	-----

DUN14 (outer)	15410288432134
---------------	----------------

Packaging outer length / height (cm)	43.0
--------------------------------------	------

SAFETY DATA

Optimal operating condition (°C)	-10-45
----------------------------------	--------

Special purpose lamp	No
----------------------	----

Dry applications use only	No
---------------------------	----

Suitable for household illumination	No
-------------------------------------	----