



Flush wireless switch


YW4003CWI - YG4003CWI - YD4003CWI
 YW4027CWI - YG4027CWI - YD4027CWI
 YW4007CWI - YG4007CWI - YD4007CWI
 YW4570CWI - YG4570CWI - YD4570CWI
 YW4574CWI - YG4574CWI - YD4574CWI




YW4003CWI
YG4003CWI
YD4003CWI




YW4027CWI
YG4027CWI
YD4027CWI



YW4007CWI
YG4007CWI
YD4007CWI



YW4570CWI
YG4570CWI
YD4570CWI



YW4574CWI
YG4574CWI
YD4574CWI

Use

Flush wireless control switches. All devices are customizable using the Home+Control APP. Flush installation into a flush mounting box. Integrated LED for low battery indication. Powered by battery 3V type CR2032 (supplied) with an autonomy of 8 years. - 1 module

Range

Designation	Cat. Nos.
Connected wireless control equipped with 2 buttons for ON/OFF and dimming control of one or more connected devices for the lighting control.	☐ YW4003CWI ☐ YG4003CWI ☐ YD4003CWI
Connected wireless control for roller shutters.	☐ YW4027CWI ☐ YG4027CWI ☐ YD4027CWI
Connected wireless control for multicolour lighting.	☐ YW4007CWI ☐ YG4007CWI ☐ YD4007CWI
Connected wireless control for Home/Away scenario.	☐ YW4570CWI ☐ YG4570CWI ☐ YD4570CWI
Connected wireless control for Wake Up/Sleep scenario.	☐ YW4574CWI ☐ YG4574CWI ☐ YD4574CWI

Colors: ☐ White ☐ Stone ☐ Dark

Standards and approvals

The undersigned, BTICINO, declares that the radio-electric equipment type (YW4003CWI - YG4003CWI - YD4003CWI - YW4027CWI - YG4027CWI - YD4027CWI - YW4007CWI - YG4007CWI - YD4007CWI - YW4570CWI - YG4570CWI - YD4570CWI - YW4574CWI - YG4574CWI - YD4574CWI) complies with directive 2014/53/EU. The full text of the EU declaration of conformity is available on the following website: www.bticino.it/red

Technical characteristics

- Mechanical characteristics

Protection against impacts: IK 02
 Protection against solid bodies/liquids: IP 20 without plate and rocker plate

- Material characteristics

Mechanism casing: ABS
 Mechanism functional cover: PC
 Halogen-free
 UV resistant

Self-extinguishing: 650°C/30 s


- Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied)
 Battery life: 8 years for 10 activations a day
ZigBee radio technology frequency: 2.4 GHz to 2.4835 GHz
 Wireless mesh network, self-adaptive and secure (AES 128), conforming to standard IEEE 802.15.4 (LR-WPAN)
 Power level: < 100 mW

- Climate characteristics

Usage temperature: +5°C to +45°C
 Storage temperature: 0°C to +45°C

Overall dimensions (mm)

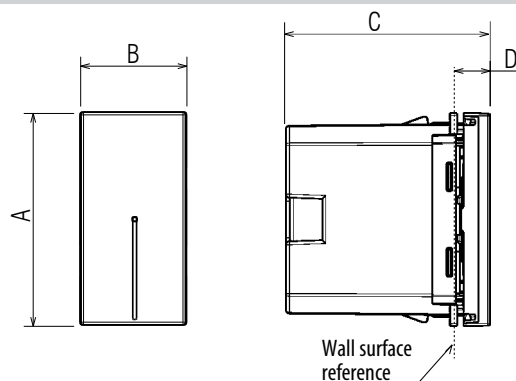


A	B	C	D
45	22,5	43,2	8,6


Flush wireless switch

Operation

Front view

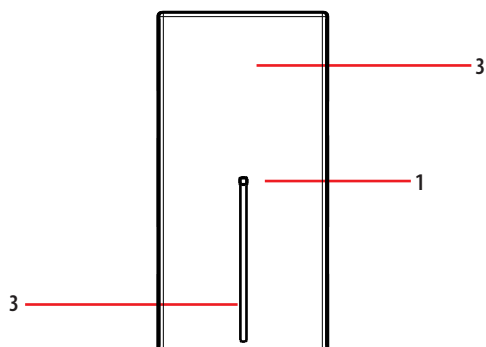

Front view without coverkey

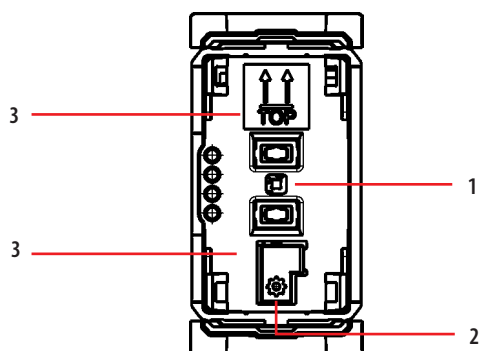

Legend

1. LED indicator: useful during installation
2. RESET button used to return to factory settings
3. Control pushbutton

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

The plates must not be painted.



Take care to recycle the battery appropriately.

RAEE/WEEE: bticino.com/disposal