


Contactless switches for light



..4003TLAB

1. USE

Switches the light on or off by simply passing a hand in front of the switch.
Detection distance: approximately 6 cm.

Can be used as:

- Simple switch: wired without neutral
- 2-way switch: must be wired with neutral
- Master/slave: must be wired with neutral, 3 slaves max.
- NO pushbutton: must be wired with neutral, for controlling a relay, latching relay or "with Netatmo" micromodule.


For installation in any type of box.

2. RANGE

Designation	Item
Contactless switch for light.	☐ YW4003TL
With illuminated indicator, active by default (can be deactivated).	☒ YG4003TL
	☒ YD4003TL

Colors: ☐ White ☒ Stone ☒ Dark

3. DIMENSIONS (mm)

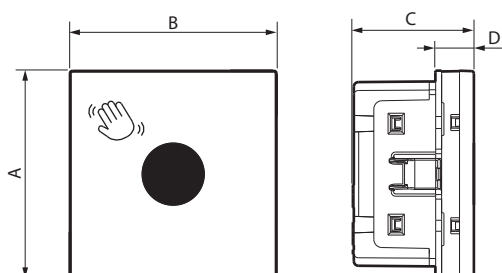

A	B	C	D
45	45	26	8.6

4. CONNECTION

Terminal type: with screws
Terminal capacity: 2 x 2.5 mm²
Stripping length: 8 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
Protection against solid bodies and liquids: IP 41

■ 5.2 Material characteristics

Mechanism casing: PC
Covers: ABS

Halogen-free
UV-resistant

Self-extinguishing:
850°C/30 s for insulating components holding live parts in place.
650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics

Voltage: 110-240 V~
Power: 200 W
Frequency: 50/60 Hz

■ 5.4 Climate characteristics

Storage temperature: -10°C to +70°C
Usage temperature: -5°C to +35°C

6. CARE

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following cleaning products:
Hexane, methylated spirit, soapy water, diluted ammonia, pure bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e.catalogue.