Technical data sheet

MS4141 mounting rail, slot 22 mm, FT, perforated

Item number: 1122525



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.

E30 E90

St Steel

FT Hot-dip galvanised

Master data


Item number	1122525
Type	MS4141P0400FT
Description 1	Profile rail
Description 2	perforated, slot 22mm
Manufacturer	OBO
Dimension	400x41x41
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	1
Unit of quantity	Piece
Weight	104.7 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	2,3035 kg CO2e / 1 Piece


Technical data sheet

MS4141 mounting rail, slot 22 mm, FT, perforated

Item number: 1122525

Dimensions

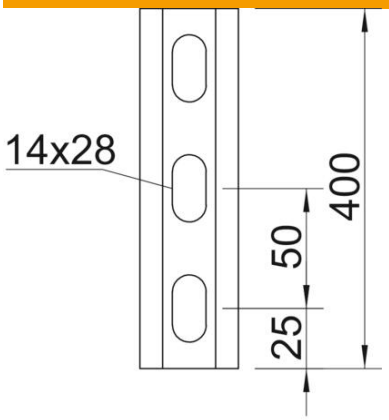



Length	400 mm
Width	41 mm
Height	41 mm
Dimension L	400 mm

Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Drill hole spacing, centre	50 mm
Maintain electrical functions	yes
Hole size	14x28
Material thickness	2.5 mm
With perforation	yes
With toothing	yes
Profile shape	C profile
ROHS-conformant	yes
Slot width	22 mm
Static value A	2.97 cm²
Static value Iy	6.05 cm⁴
Static value Iz	9.01 cm⁴
Static value Wy	2.91 cm³
Static value Wz	4.4 cm³