



Data Sheet | Item Number: 859-392

Relay module; Nominal input voltage: 24 VDC; 1 changeover contact; with gold contacts; Railway; Red status indicator; Module width: 6 mm; 2,50 mm²; gray


<https://www.wago.com/859-392>

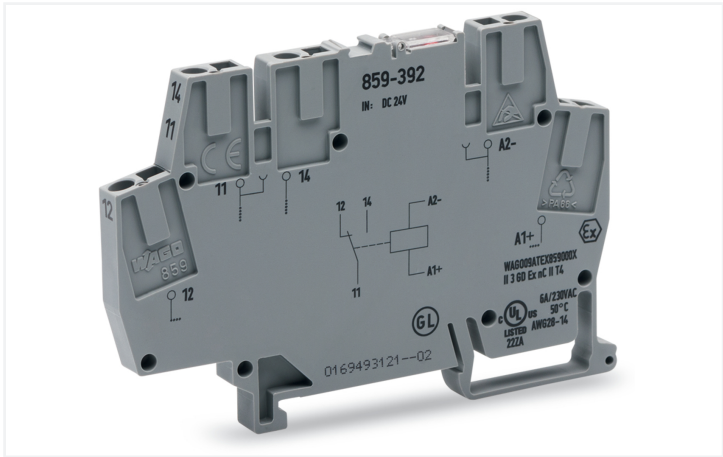



Color: ■ gray

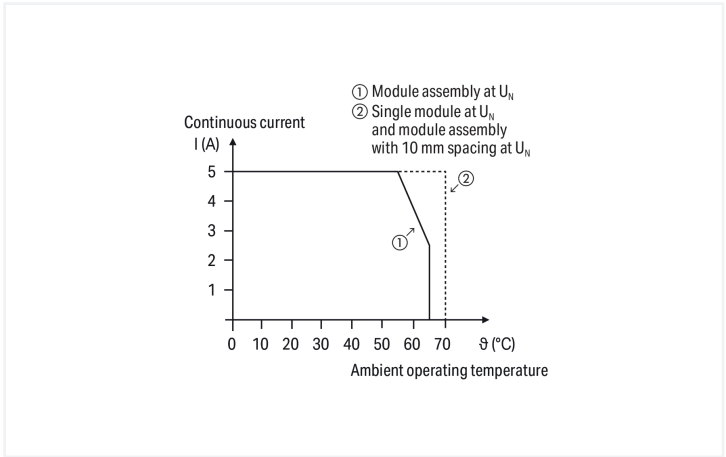

Current-carrying capacity curve

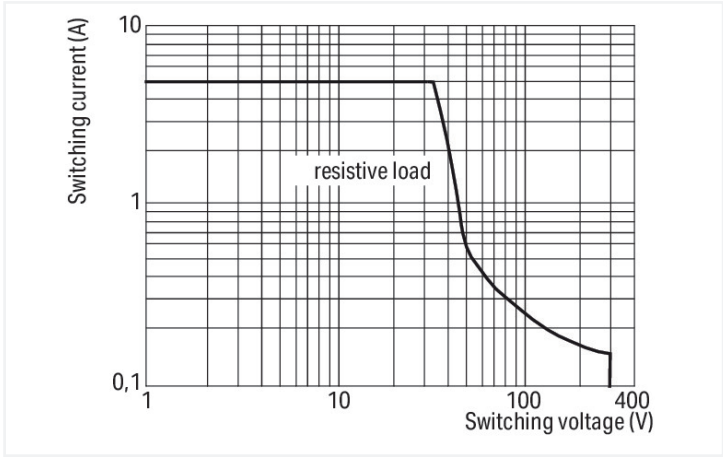

DC load limit curve

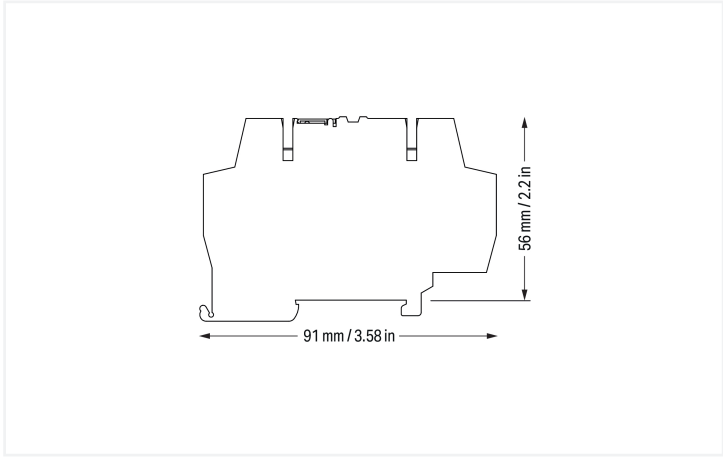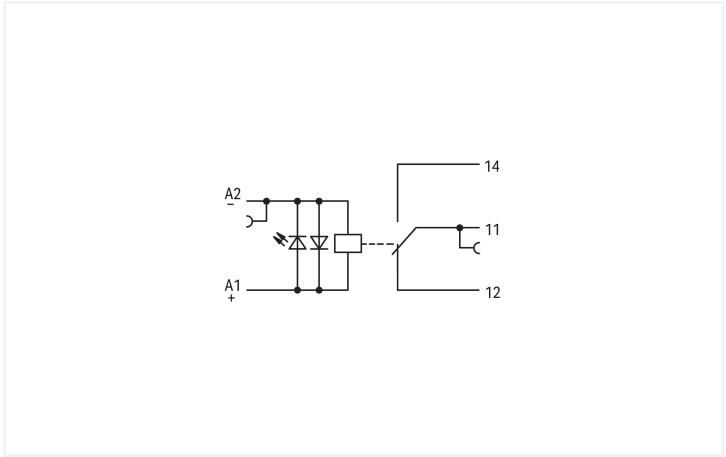



Notes	
Note	To prevent damaging the gold layer, 30 V switching voltages and 50 mA currents must not be exceeded. Higher switching power eventually evaporates the gold layer. The resulting deposits in the housing may reduce service life. To protect the relay coils and contacts, inductive loads must be dampened with an effective protection circuit.

Technical data	
Control circuit	
Nominal input voltage U _N	24 VDC
Input voltage range	-30 ... +25 %
Nominal input current at U _N	10 mA
Load circuit	
Number of changeover/switchover contacts	1
Contact material (relay)	AgNi + Au
Limiting continuous current	5 A
Switching Voltage, Max.	250 VAC
Switching power (resistive) max.	AC 1250 VA; DC (see load limit curve)
Switching capacity	AC-15: 3 A / 250 VAC; DC-13: 2 A / 24 VDC
Recommended minimum load	1 V / 1 mA / 1 mW
Pull-in time (typ.)	6 ms
Drop-out time (typ.)	6 ms
Bounce time (typ.)	3.5 ms
Electrical life (NO; resistive load; 23 °C)	50 x 10 ³ switching operations
Mechanical life	5 x 10 ⁶ switching operations
Switching frequency with/without load (max.)	6 min ⁻¹ / 180 min ⁻¹

Signaling	
Status indicator	Red LED

Safety and protection	
Rated Voltage	300 V
Rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	2
Dielectric strength (control/load circuit) (AC, 1 min)	4 kVrms
Dielectric strength (open contact) (AC, 1 min)	1 kVrms
Insulation type (control/load circuit)	Reinforced insulation (safe isolation)
Insulation type (adjacent devices)	Reinforced insulation (safe isolation)
Protection type	IP20; in connected state or when using 859-525 end plate

Connection Data	
Connection technology	CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.08 ... 1.5 mm ² / 28 ... 16 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width	6 mm / 0.236 inches
Height	91 mm / 3.583 inches
Depth from upper-edge of DIN-rail	56 mm / 2.205 inches

Mechanical data

Mounting type	DIN-35 rail
Mounting position	horizontal (standing/lying); vertical

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Insulation material (main housing)	Polyamide (PA66)
Material group	I
Flammability class per UL94	V0
Fire load	0.313 MJ
Weight	22.2 g

Environmental requirements

Ambient temperature (operation at U_N)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +70 °C
Processing temperature	-25 ... +50 °C
Temperature range of connection cable	$\geq (T_{\text{ambient}} + 20 \text{ K})$
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

Standards and Specifications

Standards/specifications	EN 61010-2-201 EN 61810-1 EN 61373 UL 508 DNV
--------------------------	---

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	10 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143604376
Customs tariff number	85364900990

Product Classification

UNSPSC	39122334
eCl@ss 10.0	27-37-16-01
eCl@ss 9.0	27-37-16-01
ETIM 9.0	EC001437
ETIM 10.0	EC001437
ECCN	NO US CLASSIFICATION



Environmental Product Compliance	
CAS-No.	7439-92-1 79-94-7
REACH Candidate List Substance	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(a)
SCIP notification number (Austria)	41a2ccf7-fcda-4abd-a5c2-6967e426e715
SCIP notification number (Belgium)	dfe4921c-393a-4232-a16e-d6a25e82fc11
SCIP notification number (Bulgaria)	e24eabe4-c872-4545-8194-a2f15c48b067
SCIP notification number (Czech Republic)	21f484dc-57bb-4390-9143-74a0fba0c836
SCIP notification number (Denmark)	0889608a-36bf-4fac-9237-8d23c2678663
SCIP notification number (Finland)	34a091fe-4fef-4adb-96b4-7724f55f0cc8
SCIP notification number (France)	39578dad-4c1a-457c-ba3e-34df19fedf18
SCIP notification number (Germany)	2ca00d07-8ee8-4060-b210-971a1815487b
SCIP notification number (Hungary)	edee235b-6ddc-4cce-8f55-f64e0de68e1e
SCIP notification number (Italy)	4b1069e6-15a3-4626-8784-55cd99e4ec12
SCIP notification number (Netherlands)	fb348a60-dece-48ed-9917-0aaf477c197b
SCIP notification number (Poland)	0c90979d-0b0b-4785-b04e-def173eecbef
SCIP notification number (Romania)	b1f7d8f6-5b97-4667-bde5-2b0b1125c6a6
SCIP notification number (Sweden)	d9d503d6-c576-4816-879f-1e777b080fdc

Approvals / Certificates			
General approvals		Declarations of conformity and manufacturer's declarations	
EAC UL			
Approval	Standard		Certificate Name
EAC	TP TC 004/2011		EAC CoC 03078
GZO Almaty Standart			
UL	UL 508	E175199 Sec.4	
Underwriters Laboratories Inc. (ORDINARY LOCATIONS)			

Approvals for marine applications		
		
Approval	Standard	Certificate Name
DNV DNV Germany GmbH	DNV-CG-0339,Aug.2021	TAA00001D1

Approvals for hazardous areas		
 DEKRA 8505 		
Approval	Standard	Certificate Name
CCC CNEX	CNCA-C23-01	2021312304000982 (Ex ec nC IIC T4 Gc)
UKEx WAGO GmbH & Co. KG	EN 60079-0	UKCA_WA-GO22UKEX007X_ec nC



Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 859-392	↓

Documentation			
Bid Text		Instruction Leaflet	
859-392	19.02.2019	xml 4.96 KB	↓
859-392	20.02.2019	docx 17.30 KB	↓
		CCC Ex (Additional information)	26.04.2023
		pdf 132.68 KB	↓
		Relay modules, Opto-coupler modules	V 2.0.0 19.01.2022
		pdf 2066.27 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 859-392	EPLAN Data Portal 859-392
↓	↓
	WSCAD Universe 859-392
	↓
	ZUKEN Portal 859-392
	↓

1 Compatible Products
1.1 Optional Accessories
1.1.1 End plate
1.1.1.1 End plate



[Item No.: 859-525](#)
End and intermediate plate; 1 mm thick; gray

1.1.1.2 Intermediate plate
Item No.: 859-525 End and intermediate plate; 1 mm thick; gray



1.1.2 Ferrule			
1.1.2.1 Ferrule			
			
Item No.: 216-321 Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow	Item No.: 216-322 Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise	Item No.: 216-221 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white	Item No.: 216-222 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray
			
Item No.: 216-223 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red	Item No.: 216-224 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black		
1.1.3 Jumper			
1.1.3.1 Jumper			
			
Item No.: 859-410/000-006 Jumper; for jumper slot; 10-way; insulated; blue	Item No.: 859-410 Jumper; for jumper slot; 10-way; insulated; light gray	Item No.: 859-410/000-005 Jumper; for jumper slot; 10-way; insulated; red	Item No.: 859-410/000-029 Jumper; for jumper slot; 10-way; insulated; yellow
			
Item No.: 859-402/000-006 Jumper; for jumper slot; 2-way; insulated; blue	Item No.: 859-402 Jumper; for jumper slot; 2-way; insulated; light gray	Item No.: 859-402/000-005 Jumper; for jumper slot; 2-way; insulated; red	Item No.: 859-402/000-029 Jumper; for jumper slot; 2-way; insulated; yellow
			
Item No.: 859-403/000-006 Jumper; for jumper slot; 3-way; insulated; blue	Item No.: 859-403 Jumper; for jumper slot; 3-way; insulated; light gray	Item No.: 859-403/000-005 Jumper; for jumper slot; 3-way; insulated; red	Item No.: 859-403/000-029 Jumper; for jumper slot; 3-way; insulated; yellow
			
Item No.: 859-404/000-006 Jumper; for jumper slot; 4-way; insulated; blue	Item No.: 859-404 Jumper; for jumper slot; 4-way; insulated; light gray	Item No.: 859-404/000-005 Jumper; for jumper slot; 4-way; insulated; red	Item No.: 859-404/000-029 Jumper; for jumper slot; 4-way; insulated; yellow
			
Item No.: 859-405/000-006 Jumper; for jumper slot; 5-way; insulated; blue	Item No.: 859-405 Jumper; for jumper slot; 5-way; insulated; light gray	Item No.: 859-405/000-005 Jumper; for jumper slot; 5-way; insulated; red	Item No.: 859-405/000-029 Jumper; for jumper slot; 5-way; insulated; yellow
			
Item No.: 859-406/000-006 Jumper; for jumper slot; 6-way; insulated; blue	Item No.: 859-406 Jumper; for jumper slot; 6-way; insulated; light gray	Item No.: 859-406/000-005 Jumper; for jumper slot; 6-way; insulated; red	Item No.: 859-406/000-029 Jumper; for jumper slot; 6-way; insulated; yellow
			
Item No.: 859-407/000-006 Jumper; for jumper slot; 7-way; insulated; blue	Item No.: 859-407 Jumper; for jumper slot; 7-way; insulated; light gray	Item No.: 859-407/000-005 Jumper; for jumper slot; 7-way; insulated; red	Item No.: 859-407/000-029 Jumper; for jumper slot; 7-way; insulated; yellow
			
Item No.: 859-408/000-006 Jumper; for jumper slot; 8-way; insulated; blue	Item No.: 859-408 Jumper; for jumper slot; 8-way; insulated; light gray	Item No.: 859-408/000-005 Jumper; for jumper slot; 8-way; insulated; red	Item No.: 859-408/000-029 Jumper; for jumper slot; 8-way; insulated; yellow
			
Item No.: 859-409/000-006 Jumper; for jumper slot; 9-way; insulated; blue	Item No.: 859-409 Jumper; for jumper slot; 9-way; insulated; light gray	Item No.: 859-409/000-005 Jumper; for jumper slot; 9-way; insulated; red	Item No.: 859-409/000-029 Jumper; for jumper slot; 9-way; insulated; yellow

1.1.4 Marking

1.1.4.1 Marker



Item No.: 2009-145
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 248-502
Mini-WSB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

Item No.: 248-503
Mini-WSB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white

Item No.: 248-504
Mini-WSB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 248-506
Mini-WSB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white

Item No.: 248-501
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

1.1.4.2 Marking device



Item No.: 210-110
Fiber-tip pen

1.1.5 Test and measurement

1.1.5.1 Testing accessories



Item No.: 859-500
WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 10 mm uninsulated; Test lead for soldering up to 0,5mm²

1.1.6 Tool


1.1.6.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured


Installation Notes

Conductor termination



Conductor termination

Commoning



Easy commoning using adjacent jumpers

Marking



Marking via Mini-WSB Quick Marking System