



Data Sheet | Item Number: 788-549


Relay module; Nominal input voltage: 230 VAC; 2 changeover contacts; Limiting continuous current: 8 A; with manual operation; Red status indicator; Module width: 15 mm

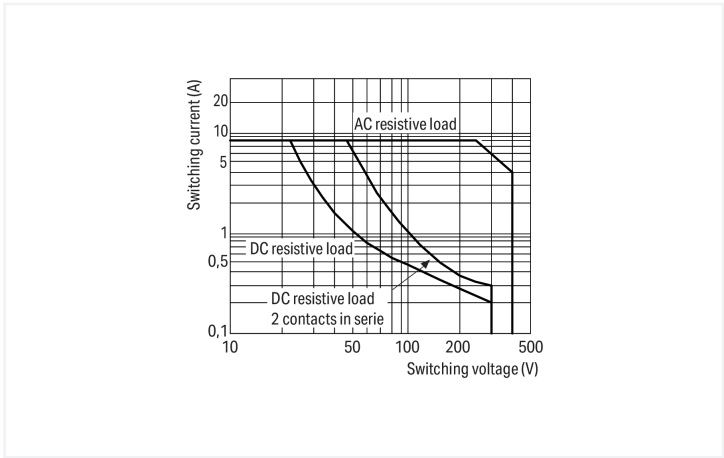



<https://www.wago.com/788-549>

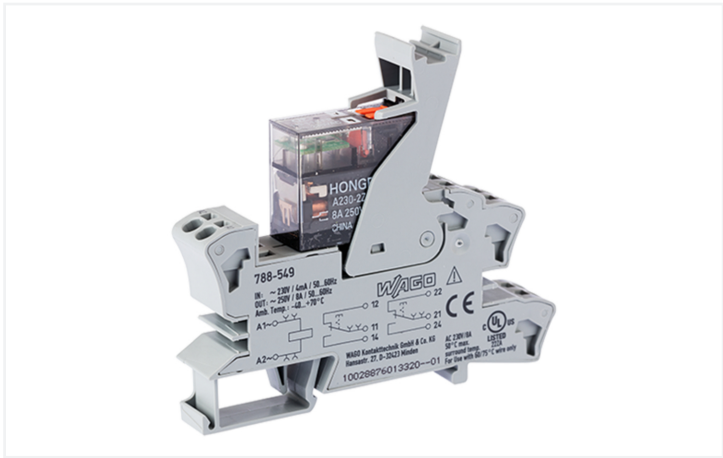

Load limit curve

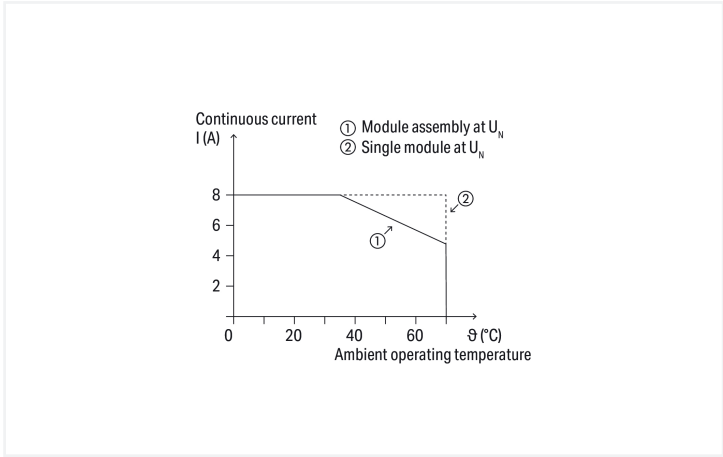

Current-carrying capacity curve

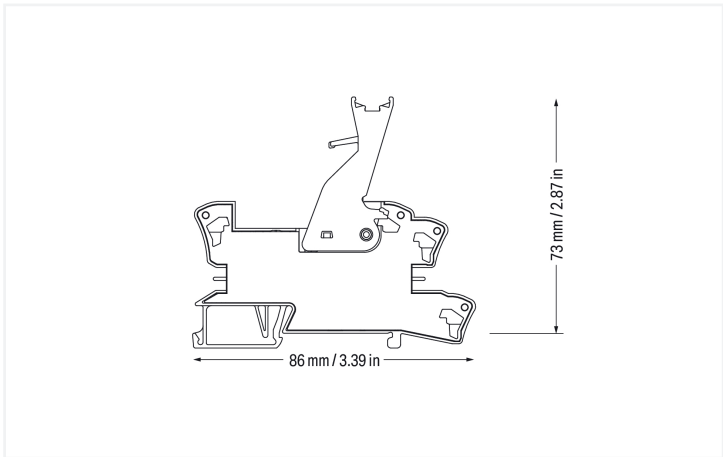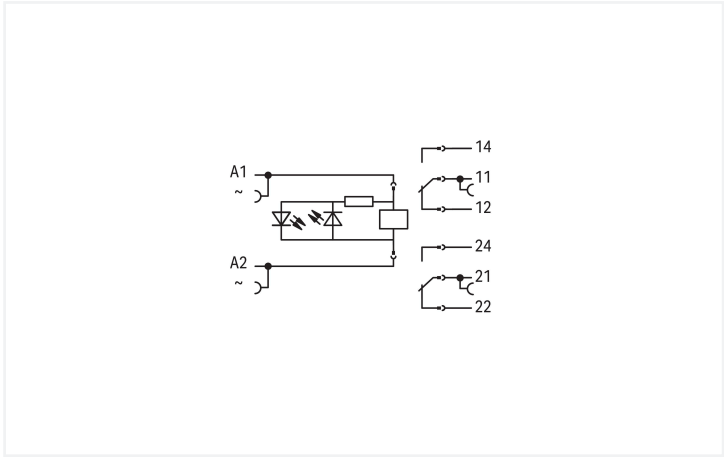



Notes	
Safety Information	A separator plate (e.g., 209-191) must be used for voltages exceeding 250 V between adjacent relay modules and to comply with reinforced insulation requirements.
Note	Reinforced insulation between coil and contacts To protect the relay coils and contacts, inductive loads must be dampened with an effective protection circuit.

Technical data	
Control circuit	Load circuit
Nominal input voltage U _N	230 VAC
Input voltage range	±10 %
Nominal input current at U _N	4 mA
	Number of changeover/switchover contacts
	2
	Contact material (relay)
	AgNi
	Limiting continuous current
	8 A
	Inrush current (resistive) max.
	(AC) 16 A / 0.02 s; (AC) 12 A / 4 s
	Switching Voltage, Max.
	250 VAC
	Switching power (resistive) max.
	AC 2000 VA; DC (see load limit curve)
	Switching capacity
	AC-15: 1.5 A / 240 VAC; DC-13: 1 A / 24 VDC
	Recommended minimum load
	12 V / 10 mA
	Pull-in time (typ.)
	15 ms
	Drop-out time (typ.)
	8 ms
	Bounce time (typ.)
	7 ms
	Electrical life (NO; resistive load; 23 °C)
	10 x 10 ³ switching operations
	Mechanical life
	5 x 10 ⁶ switching operations
	Switching frequency with/without load (max.)
	6 min ⁻¹ / 300 min ⁻¹

Signaling	
Status indicator	Red LED Mechanical

Safety and protection	
Rated Voltage	250 V
Rated impulse withstand voltage	4 kV
Pollution degree	3
Dielectric strength (control/load circuit) (AC, 1 min)	5 kVrms
Dielectric strength (open contact) (AC, 1 min)	1 kVrms
Dielectric strength (load/load circuit) (AC, 1 min)	2.5 kVrms
Safety Information	A separator plate (e.g., 209-191) must be used for voltages exceeding 250 V between adjacent relay modules and to comply with reinforced insulation requirements.
Protection type	IP20

Connection Data	
Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.34 ... 2.5 mm ² / 22 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm ² / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data

Width	15 mm / 0.591 inches
Height	86 mm / 3.386 inches
Depth from upper-edge of DIN-rail	73 mm / 2.874 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Note (material data)	Information on material specifications can be found here
Fire load	0.662 MJ
Weight	46 g

Environmental requirements

Ambient temperature (operation at U_N)	-40 ... +70 °C
Ambient temperature UL (operation at U_N)	-40 ... +50 °C
Ambient temperature (storage)	-40 ... +70 °C
Processing temperature	-25 ... +50 °C
Temperature range of connection cable	$\geq (T_{\text{ambient}} + 20 \text{ K})$

Standards and Specifications

Standards/specifications	EN 61010-2-201 EN 61810-1 EN 61373 UL 508
--------------------------	--

Basic relay

WAGO Basic Relay	788-949
------------------	---------

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	15 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821226802
Customs tariff number	85364900990

Product Classification

UNSPSC	39122334
eCl@ss 10.0	27-37-16-01
eCl@ss 9.0	27-37-16-01
ETIM 9.0	EC001437
ETIM 10.0	EC001437
ECCN	NO US CLASSIFICATION



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03084	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UL Underwriters Laboratories Inc. (ORDINARY LOCATI- ONS)	UL 508	E175199 Vol.1 Sec.6			

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 788-549	

Documentation

Bid Text				Instruction Leaflet			
788-549	19.02.2019	xml 4.97 KB		Sockets with Elementa- ry Relay/ SSR	V 1.0.1 09.10.2020	pdf 2271.22 KB	
788-549	25.01.2019	docx 16.82 KB					

CAD/CAE-Data

CAD data		CAE data	
2D/3D Models 788-549		EPLAN Data Portal 788-549	
		WSCAD Universe 788-549	
		ZUKEN Portal 788-549	



1 Compatible Products

1.1 Optional Accessories

1.1.1 Basic relay

1.1.1.1 Suppressor module



[Item No.: 788-148](#)
Filter module; RC filter element; Nominal voltage: 230 VAC

1.1.2 Ferrule

1.1.2.1 Ferrule



[Item No.: 216-241](#)
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



[Item No.: 216-242](#)
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



[Item No.: 216-243](#)
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



[Item No.: 216-244](#)
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



[Item No.: 216-542](#)
Twin ferrule; Sleeve for 2 x 1 mm² / AWG 2 x 18; red, insulated; 12 mm long; red

1.1.3 Indicators

1.1.3.1 Status indication



[Item No.: 788-125](#)
Accessories for relay modules; Operation status indicator: red

1.1.4 Jumper

1.1.4.1 Jumper



[Item No.: 788-118](#)
Jumper; for jumper slot; 2-way; from 1 to 3; insulated; light gray



[Item No.: 788-113](#)
Jumper; for jumper slot; 2-way; insulated; light gray



[Item No.: 859-402](#)
Jumper; for jumper slot; 2-way; insulated; light gray



[Item No.: 788-114](#)
Jumper; for jumper slot; 3-way; insulated; light gray



[Item No.: 788-115](#)
Jumper; for jumper slot; 4-way; insulated; light gray



[Item No.: 788-116](#)
Jumper; for jumper slot; 6-way; insulated; light gray



[Item No.: 788-117](#)
Jumper; for jumper slot; 8-way; insulated; light gray

1.1.5 Marking

1.1.5.1 Double marker carrier



[Item No.: 209-128](#)
Adaptor; gray

1.1.5.2 Group marker carrier



[Item No.: 249-105](#)
Group marker carrier; gray



[Item No.: 209-145](#)
Group marker carrier; white

1.1.5.3 Marker



[Item No.: 209-183](#)
Marker; white



[Item No.: 793-502](#)
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-503](#)
WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-504](#)
WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-505](#)
WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-501](#)
WMB marking card; as card; not stretchable; plain; snap-on type; white



[Item No.: 2009-115](#)
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.1.5.4 Marking device



[Item No.: 210-110](#)
Fiber-tip pen

1.1.5.5 Marking strip



[Item No.: 2009-110](#)
Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.1.5.6 Protective marker cover



[Item No.: 209-184](#)
Protection cover; transparent

1.1.6 Tool

1.1.6.1 Operating tool




Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured


Installation Notes

Conductor termination



Conductor termination

Commoning



Easy commoning using adjacent jumpers

Marking



Marking using WMB Multi markers and group marker carriers.