





Features

• - Instant illumination, - Excellent colour rendering, - Sparkling light output, - Transformer free operation, - Average life 1500hours, - Suitable for outdoor floodlighting/security lighting, - Suitable for interior floodlighting, uplighting and wall washing.

Product Overview


Product name	DE 78MM ECO 230V 80W R7S BL
Technology	Halogen
Watt (Rated) (W)	80
Lamp shape	Tube, double-ended
Cap/Base	R7s
Lamp finish	Clear
Fixture rating	Enclosed
General application	Education, Hospitality, Logistics & Industry, Museums
	& Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000038
Correlated colour temperature (k)	2900
Light colour	Homelight
CRI (Ra)	100
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Wattage (W)	80
Power consumption (W)	80
Dimmable	Yes



Average life (Nominal) (h)	1500
Product EAN number	5410288225746
Warranty	2 years
Dimming method	Mains: leading / trailing edge
Useful luminous flux (#use)	1395

Technical drawings



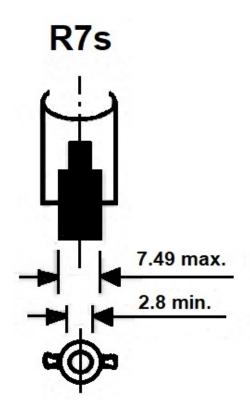

Data table

GENERAI	L DATA
----------------	--------

Product name	DE 78MM ECO 230V 80W R7S BL
Technology	Halogen
Watt (Rated) (W)	80
Lamp shape	Tube, double-ended



0022574

Cap/Base	R7s
Lamp finish	Clear
Fixture rating	Enclosed
General application	Education, Hospitality, Logistics & Industry,
	Museums & Galleries, Office, Residential &
	Consumer, Retail
ETIM Class	EC000038
Warranty	2 years

OPTICAL DATA

Useful luminous flux (#use)	1395
Luminous flux (Rated) (lm)	1395
Correlated colour temperature (k)	2900
Light colour	Homelight
CRI (Ra)	100
Colour Variation Initial (SDCM)	N/A
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable

ELECTRICAL DATA

Power consumption (W)	80
Wattage (W)	80
Equivalent watt (W)	100
Starting time (max) (s)	0.01
Warm-up time to 60% of full light (max)	Instant full light
(s)	
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
Control gear required	No
No. Of switching cycles before	>10000
premature failures	
Dimmable	Yes
Dimming method	Mains: leading / trailing edge



Lamp Energy Label (class)	G
kWh per 1000 hours burning time	80

LIFETIME DATA

Average life (Nominal) (h)	1500
Average life (Rated) (h)	1500

PHYSICAL DATA

Nominal Product Length (mm)	80.3
Nominal Product Diameter (mm)	12
Max. Lamp Length (mm) - C/L	81.0
Max. Lamp Diameter (mm) - D	12
Weight (kg)	0.005

PACKAGING

Product EAN number	5410288225746
Packaging single length / height (cm)	14.0
Packaging single width (cm)	12.0
Packaging single depth (cm)	1.2
DUN14 (inner)	15410288225743
Units per outer package	10
Packaging outer length / height (cm)	14.9
Packaging outer width (cm)	14.5
Packaging outer depth (cm)	12.4

SAFETY DATA

Breakage cleaning instructions	N/A
Recommendation for disposal at end of	Not Applicable
life	
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	Yes
Safety message	None



Energy label



0022574











F



kWh/1000h

80



G



0022574

















80 kWh/1000h

