

Features

- - Single-bend pin base compact lamp, - Suitable for operation on electronic control gear (SE version), - For use with magnetic ballast (S Version), - Dimmable with suitable ballast, - Excellent colour rendering, - Suitable for emergency lighting

Product Overview

Product name	LYNX-S 11W/840 G23 SLV 10
Technology	Compact Fluorescent
Watt (Rated) (W)	11
Lamp shape	Other
Cap/Base	G23
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944090
E-number SE	8357267
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	82
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	Not applicable
Wattage (W)	11
Power consumption (W)	11
Dimmable	No
Average life (Nominal) (h)	12000
Product EAN number	5410288258911
Dimming method	N/A

LYNX-S 11W/840 G23 SLV 10
0025891

Colour Code	840
Useful luminous flux (#use)	900

Technical drawings



Data table

GENERAL DATA

Product name	LYNX-S 11W/840 G23 SLV 10
Technology	Compact Fluorescent
Watt (Rated) (W)	11
Lamp shape	Other
Cap/Base	G23
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944090
E-number SE	8357267

OPTICAL DATA

Useful luminous flux (#use)	900
-----------------------------	-----

LYNX-S 11W/840 G23 SLV 10 0025891

Luminous flux (Rated) (lm)	900
Rated lamp efficacy 100h 50Hz at 25°C (lm/W)	76
Ambient temperature for maximum luminous flux (°C)	25
Correlated colour temperature (k)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	82
Colour Variation Initial (SDCM)	5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	85
Rated lumen maint. factor (%) at 4000 h 50Hz	78
Rated lumen maint. factor (%) at 8000 h 50Hz	75

ELECTRICAL DATA

Power consumption (W)	11
Wattage (W)	11
Starting time (max) (s)	10 Sec
Current (A)	0.155
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Ignition voltage (V)	186
Control gear required	Yes
Dimmable	No
Dimming method	N/A
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	11

LIFETIME DATA

LYNX-S 11W/840 G23 SLV 10 0025891

Average life (Nominal) (h)	12000
Average life (Rated) (h)	12000
Rated survival factor (%) at 2000 h 50Hz	96
Rated survival factor (%) at 4000 h 50Hz	90
Rated survival factor (%) at 6000 h 50Hz	80
Rated survival factor (%) at 8000 h 50Hz	72
Rated survival factor (%) at 12000 h 50Hz	62

PHYSICAL DATA

Nominal Product Length (mm)	236
Nominal Product Diameter (mm)	33
Max. Length base to base (mm) - A	236
Max. Lamp Diameter (mm) - D	13
Weight (kg)	0.038

PACKAGING

Product EAN number	5410288258911
Packaging single length / height (cm)	2.2
Packaging single width (cm)	3.8
Packaging single depth (cm)	24.1
DUN14 (inner)	15410288258918
Units per inner package	10
Packaging inner length / height (cm)	12.4
Packaging inner width (cm)	7.9
Packaging inner depth (cm)	25.6
DUN14 (outer)	25410288258915
Units per outer package	100
Packaging outer length / height (cm)	42.3
Packaging outer width (cm)	27.6
Packaging outer depth (cm)	25.7

SAFETY DATA

Lamp mercury content (mg)	2.5
Breakage cleaning instructions	Applicable




LYNX-S 11W/840 G23 SLV 10
0025891

Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes

Energy label

**ENERG**
SYLVANIA
0025891

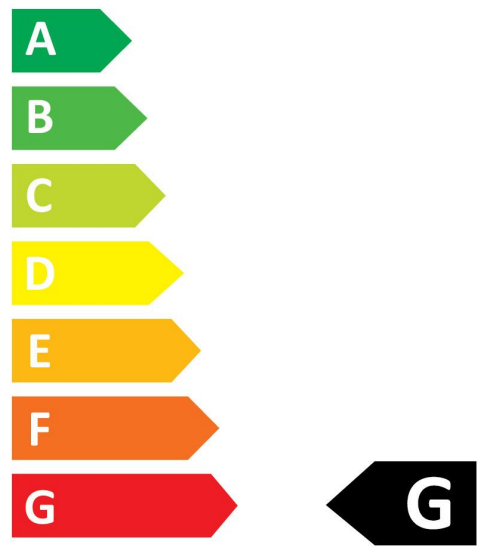


11
kWh/1000h



2019/2015

**ENERG**
SYLVANIA
0025891

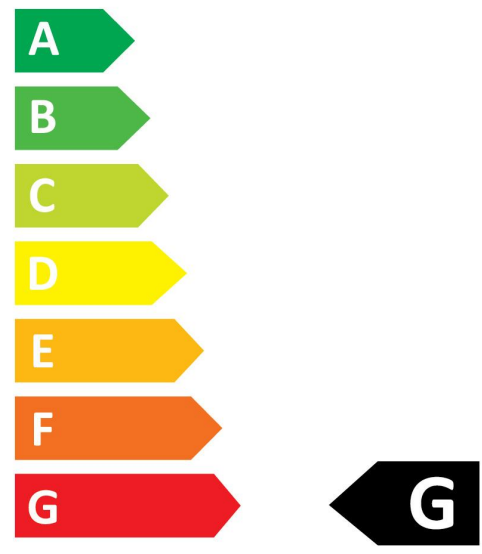

11
kWh/1000h



2019/2015