

Features

- - Compact and high performance double bend 2-bend pin lamp, - Suitable for operation on electronic control gear (DE type) and magnetic ballast (D version), - Dimmable with suitable dimmer, - Excellent colour rendering, - Suitable for emergency lighting

Product Overview

Product name	Lynx-DE Superia 26W/840 G24Q-3 SLV
Technology	Compact Fluorescent
Watt (Rated) (W)	26
Lamp shape	Other
Cap/Base	G24q-3
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944122
E-number SE	8357380
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	82
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	Not applicable
Wattage (W)	26
Power consumption (W)	26
Dimmable	No
Average life (Nominal) (h)	12000
Product EAN number	5410288259277
Dimming method	Mains: leading / trailing edge

Lynx-DE Superia 26W/840 G24Q-3 SLV
0025927

Colour Code	840
Useful luminous flux (#use)	1800

Technical drawings



Data table

GENERAL DATA	
Product name	Lynx-DE Superia 26W/840 G24Q-3 SLV
Technology	Compact Fluorescent
Watt (Rated) (W)	26
Lamp shape	Other
Cap/Base	G24q-3
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944122
E-number SE	8357380

OPTICAL DATA	
Useful luminous flux (#use)	1800

Lynx-DE Superia 26W/840 G24Q-3 SLV 0025927

Luminous flux (Rated) (lm)	1800
Rated lamp efficacy 100h 50Hz at 25°C (lm/W)	66
Ambient temperature for maximum luminous flux (°C)	25
Correlated colour temperature (k)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	82
Colour Variation Initial (SDCM)	5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	85
Rated lumen maint. factor (%) at 4000 h 50Hz	84
Rated lumen maint. factor (%) at 8000 h 50Hz	81

ELECTRICAL DATA

Power consumption (W)	26
Wattage (W)	26
Starting time (max) (s)	10 Sec
Current (A)	0.325
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240.0
Control gear required	Yes
Dimmable	No
Dimming method	Mains: leading / trailing edge
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	28

LIFETIME DATA

Average life (Nominal) (h)	12000
----------------------------	-------



Lynx-DE Superia 26W/840 G24Q-3 SLV
0025927

Average life (Rated) (h)	12000
Rated survival factor (%) at 2000 h 50Hz	96
Rated survival factor (%) at 4000 h 50Hz	90
Rated survival factor (%) at 6000 h 50Hz	80
Rated survival factor (%) at 8000 h 50Hz	72
Rated survival factor (%) at 12000 h 50Hz	70
Rated survival factor (%) at 16000 h 50Hz	71

PHYSICAL DATA

Nominal Product Length (mm)	167
Nominal Product Diameter (mm)	35
Max. Length base to base (mm) - A	164
Max. Lamp Diameter (mm) - D	13
Weight (kg)	0.058

PACKAGING


Product EAN number	5410288259277
Packaging single length / height (cm)	17.32
Packaging single width (cm)	3.61
Packaging single depth (cm)	3.61
DUN14 (inner)	15410288259274
Units per outer package	10
Packaging outer length / height (cm)	19.61
Packaging outer width (cm)	8.0
Packaging outer depth (cm)	18.72

SAFETY DATA

Lamp mercury content (mg)	2.5
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes

Energy label

**ENERG**
SYLVANIA
0025927

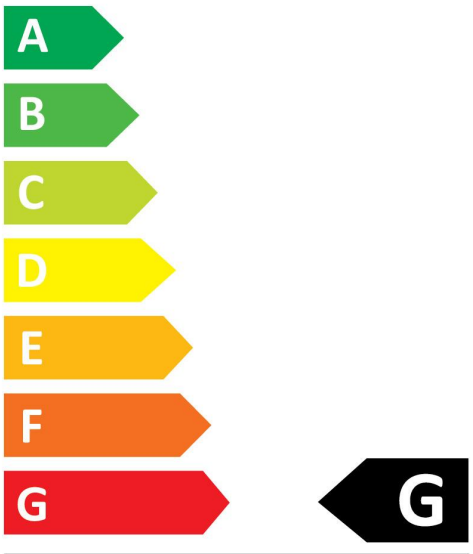


26
kWh/1000h



2019/2015

**ENERG**
SYLVANIA
0025927

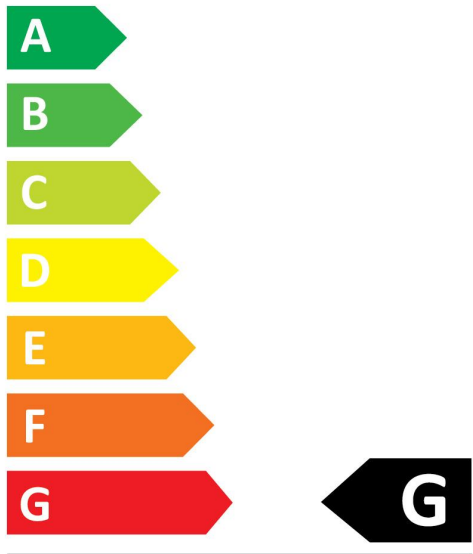

26
kWh/1000h



2019/2015