



Features

- - 2D shaped Fluorescent lamp with GR10q base, - Uniform distribution of light, - Flat and slim profile, - 4-pin base design with no starter, Average life 10K hrs


Product Overview

Product name	Lynx QE 38W GR10Q 835
Technology	Compact Fluorescent
Watt (Rated) (W)	38
Lamp shape	Other
Cap/Base	GR10q
Lamp finish	Frosted/Coated
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000087
E-number FI	4940133
E-number SE	8357348
Correlated colour temperature (k)	3500
Light colour	White
CRI (Ra)	82
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	Not applicable
Wattage (W)	38
Power consumption (W)	38

Lynx QE 38W GR10Q 835
0025003

Dimmable	Yes
Average life (Nominal) (h)	10000
Product EAN number	5410288250038
Dimming method	1-10V (Analogue), DALI, Switch-dim (mains-rated)
Colour Code	835
Useful luminous flux (#use)	2850

Technical drawings

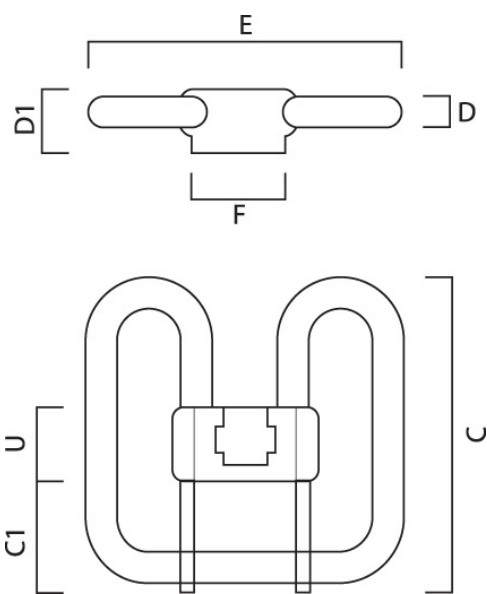

Data table

GENERAL DATA

Product name	Lynx QE 38W GR10Q 835
Technology	Compact Fluorescent
Watt (Rated) (W)	38
Lamp shape	Other
Cap/Base	GR10q
Lamp finish	Frosted/Coated

Lynx QE 38W GR10Q 835 0025003

General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000087
E-number FI	4940133
E-number SE	8357348

OPTICAL DATA

Useful luminous flux (#use)	2850
Luminous flux (Rated) (lm)	2850
Ambient temperature for maximum luminous flux (°C)	25
Correlated colour temperature (k)	3500
Light colour	White
Colour Code	835
CRI (Ra)	82
Colour Variation Initial (SDCM)	5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 4000 h 50Hz	85
Rated lumen maint. factor (%) at 6000 h 50Hz	82
Rated lumen maint. factor (%) at 8000 h 50Hz	80

ELECTRICAL DATA

Power consumption (W)	38
Wattage (W)	38
Starting time (max) (s)	<2
Warm-up time to 60% of full light (max) (s)	60
Current (A)	0.355
Primary Supply/Product voltage - min (V)	110

Lynx QE 38W GR10Q 835 0025003

Primary Supply/Product voltage - max (V)	110
Ignition voltage (V)	560
Control gear required	Yes
Dimmable	Yes
Dimming method	1-10V (Analogue), DALI, Switch-dim (mains-rated)
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	42

LIFETIME DATA

Average life (Nominal) (h)	10000
Average life (Rated) (h)	10000
Rated survival factor (%) at 2000 h 50Hz	98
Rated survival factor (%) at 4000 h 50Hz	98
Rated survival factor (%) at 6000 h 50Hz	94
Rated survival factor (%) at 8000 h 50Hz	88

PHYSICAL DATA

Nominal Product Length (mm)	201
Nominal Product Width (mm)	196
Nominal Product Height (mm)	32
Max. Length base to base (mm) - A	32
Max. Lamp Length (mm) - C/L	203
Max. Lamp Diameter (mm) - D	18.9
Weight (kg)	0.12

PACKAGING

Product EAN number	5410288250038
Packaging single length / height (cm)	20.3
Packaging single width (cm)	2.8
Packaging single depth (cm)	20.0
DUN14 (inner)	15410288250035
Units per outer package	10
Packaging outer length / height (cm)	39.7
Packaging outer width (cm)	25.1



Lynx QE 38W GR10Q 835
0025003

Packaging outer depth (cm)	23.8
----------------------------	------

SAFETY DATA


Lamp mercury content (mg)	3.50
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	Yes
Suitable for accent lighting	N/A

Lynx QE 38W GR10Q 835
0025003

Energy label




0025003

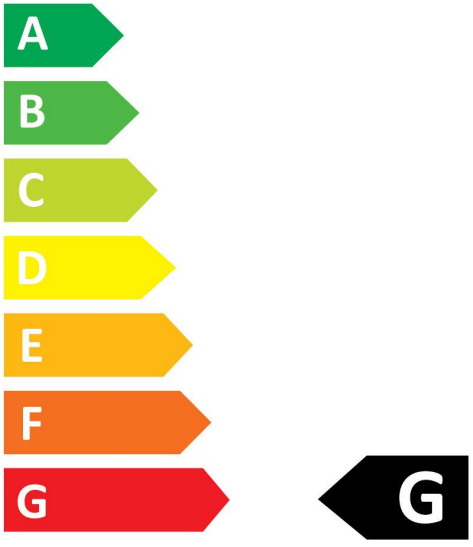

38
kWh/1000h



0025003

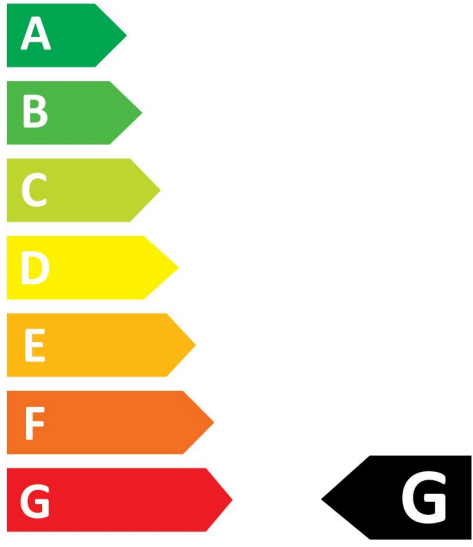

38
kWh/1000h

