

Lynx-D Superia 26W/840 G24D-3 SLV
0025915



Features

- - Compact and high performance double bend 2-bend pin lamp, - Suitable for operation on electronic control gear (DE type) and magnetic ballast (D version), - Dimmable with suitable dimmer, - Excellent colour rendering, - Suitable for emergency lighting

Product Overview

Product name	Lynx-D Superia 26W/840 G24D-3 SLV
Technology	Compact Fluorescent
Watt (Rated) (W)	26
Lamp shape	Other
Cap/Base	G24d-3
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944114
E-number SE	8357368
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	82
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	Not applicable
Wattage (W)	26
Power consumption (W)	26
Dimmable	No
Average life (Nominal) (h)	12000
Product EAN number	5410288259154

Lynx-D Superia 26W/840 G24D-3 SLV
0025915

Dimming method	N/A
Colour Code	840
Useful luminous flux (#use)	1800

Technical drawings



Data table

GENERAL DATA	
Product name	Lynx-D Superia 26W/840 G24D-3 SLV
Technology	Compact Fluorescent
Watt (Rated) (W)	26
Lamp shape	Other
Cap/Base	G24d-3
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944114
E-number SE	8357368

OPTICAL DATA

Lynx-D Superia 26W/840 G24D-3 SLV 0025915

Useful luminous flux (#use)	1800
Luminous flux (Rated) (lm)	1800
Rated lamp efficacy 100h 50Hz at 25°C (lm/W)	66
Ambient temperature for maximum luminous flux (°C)	25
Correlated colour temperature (k)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	82
Colour Variation Initial (SDCM)	5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	85
Rated lumen maint. factor (%) at 4000 h 50Hz	78
Rated lumen maint. factor (%) at 8000 h 50Hz	75

ELECTRICAL DATA

Power consumption (W)	26
Wattage (W)	26
Starting time (max) (s)	10 Sec
Current (A)	0.42
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240.0
Ignition voltage (V)	191
Control gear required	Yes
Dimmable	No
Dimming method	N/A
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	28

LIFETIME DATA

Lynx-D Superia 26W/840 G24D-3 SLV 0025915

Average life (Nominal) (h)	12000
Average life (Rated) (h)	12000
Rated survival factor (%) at 2000 h 50Hz	96
Rated survival factor (%) at 4000 h 50Hz	90
Rated survival factor (%) at 6000 h 50Hz	80
Rated survival factor (%) at 8000 h 50Hz	72
Rated survival factor (%) at 12000 h 50Hz	50
Rated survival factor (%) at 16000 h 50Hz	71

PHYSICAL DATA

Nominal Product Length (mm)	174
Nominal Product Diameter (mm)	35
Max. Length base to base (mm) - A	171
Max. Lamp Diameter (mm) - D	13
Weight (kg)	0.06

PACKAGING

Product EAN number	5410288259154
Packaging single length / height (cm)	17.3
Packaging single width (cm)	3.6
Packaging single depth (cm)	3.6
DUN14 (inner)	15410288259151
Units per outer package	10
Packaging outer length / height (cm)	18.4
Packaging outer width (cm)	8.0
Packaging outer depth (cm)	18.7

SAFETY DATA


Lamp mercury content (mg)	2.5
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Dry applications use only	Yes

Lynx-D Superia 26W/840 G24D-3 SLV
0025915

Suitable for household illumination	Yes
-------------------------------------	-----

Energy label

**ENERG**
SYLVANIA
0025915

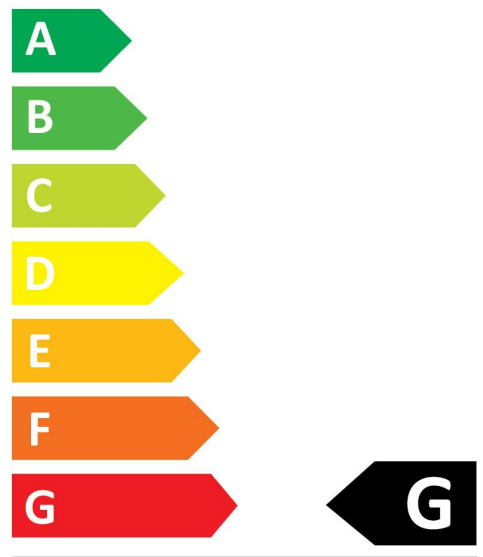


26
kWh/1000h



2019/2015

**ENERG**
SYLVANIA
0025915

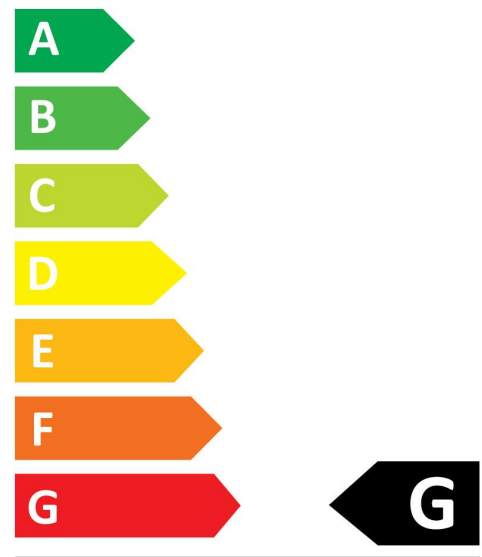

26
kWh/1000h



2019/2015